
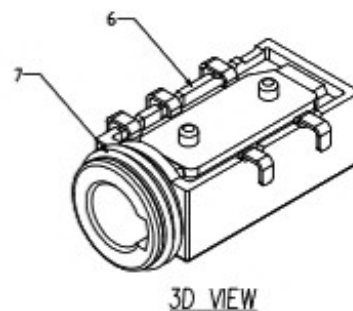




ROHS

RoHS
Compliant



1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IP67;

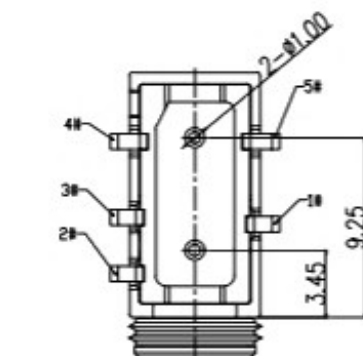

3D VIEW

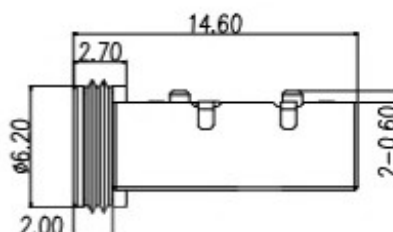


WATERPROOF RING

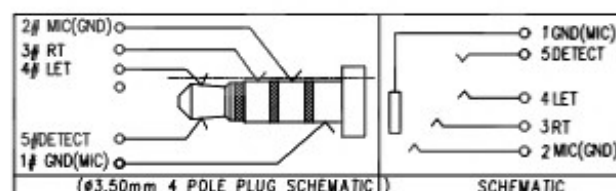


(#3.50mm 4 POLE PLUG SCHEMATIC)

SCHEMATIC

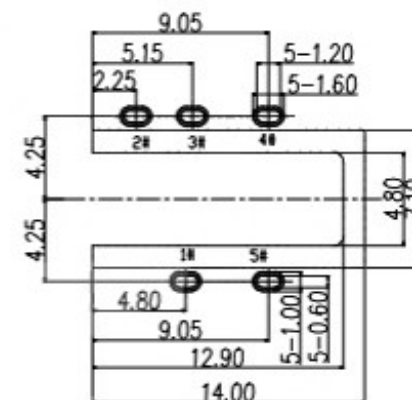P.C.B LAYOUT
TOP VIEW

7	WATERPROOF RING	1	SILICA GEL	
6	HOUSING	1	HIGH TEMPERATURE PLASTIC MATERIAL; COLOR BLACK	
5	TERMINAL 5#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL GOLD FLASH PLATING ON SOLDER AREA GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL GOLD FLASH PLATING ON SOLDER AREA GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL GOLD FLASH PLATING ON SOLDER AREA GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL GOLD FLASH PLATING ON SOLDER AREA GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
1	TERMINAL 1#	1	STAINLESS STEEL; NICKEL UNDER PLATING OVERALL GOLD FLASH PLATING ON SOLDER AREA GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
ITEM	NAME	QTY	DESCRIPTION	NOTE

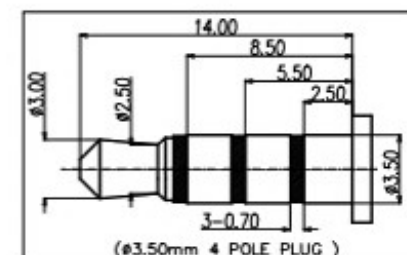

(#3.50mm 4 POLE PLUG)



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	PHONE JACK		DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.	PJ-380-A		CHECK	G.C.Chen	REV.	A1
UNIT :	TOLERANCE	UP TO 5	ANGLE	APPROVAL	DATE	
mm	OTHERWISE	ABOVE 5 ~ 30	0° ± 3°	SCALE	PAGE	1 OF 1
		±0.2				
		±0.3				
		±0.5				
		±3°				