
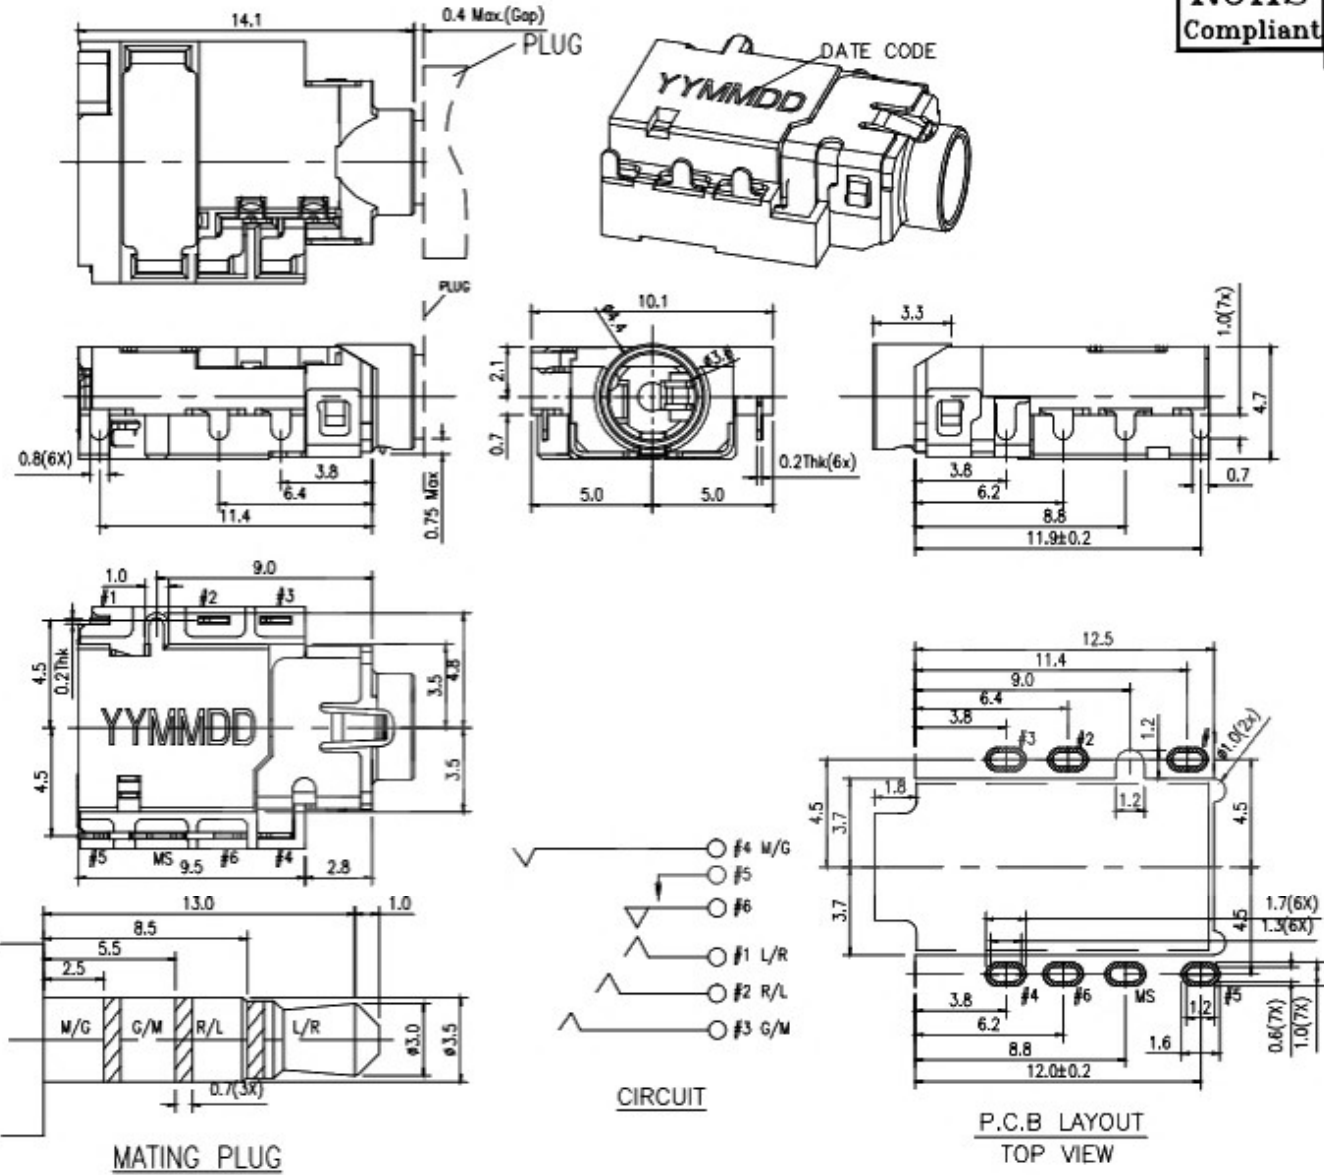


**RoHS
Compliant**

SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 1A
 - 1-2.CONTACT RESISTANCE: 30mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOL TAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - 2-1.INSERTION FORCE: 0.5KG-2.2KG
 - 2-2.WITHDRAWAL FORCE: 0.5KG-2.0KG
- LIFE TEST:5,000 CYCLES MIN
- PACKING:TAPE & REEL
- FOR HAND SOLDERING LEAD FREE PROCESS
- PRINTED DATE CODE^{YY MM DD} ON TOP OF CONNECTOR



No.	DESCRIPTION	MATERIAL	PLATING
1	TERMINAL #1	C5210	1u" Au PLATED
2	TERMINAL #2	C5210	1u" Au PLATED
3	TERMINAL #3	C5210	1u" Au PLATED
4	TERMINAL #4	C5210	1u" Au PLATED
5	TERMINAL #5	C5210	1u" Au PLATED
6	TERMINAL #6	C5210	1u" Au PLATED
7	TERMINAL MS	C2680	Ni PLATED
8	INSULATOR	PPA UL 94V0	BLACK
9	HOUSING	PPA UL 94V0	BLACK

东莞市溪榜电子有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	PHONE JACK(STEREO)	DRAWING	DWG.No.
PART NO.	PJ-597DS	CHECK	REV. A
UNIT : mm	TOLERANCE UP TO 5 ±0.2 ABOVE 5 ~ 30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3	APPROVAL	DATE
	OTHERWISE	SCALE	PAGE 1 OF 1