
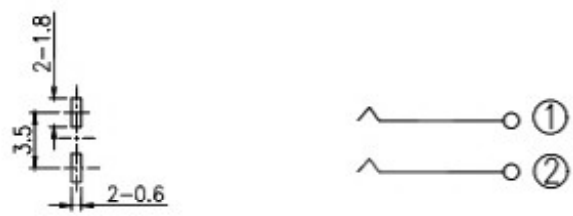


RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

**SPECIFICATIONS**

- ELECTRICAL CHARACTERISTICS:
  - 1-1.RATING: DC 12V 3A
  - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
  - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - 1-4.INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

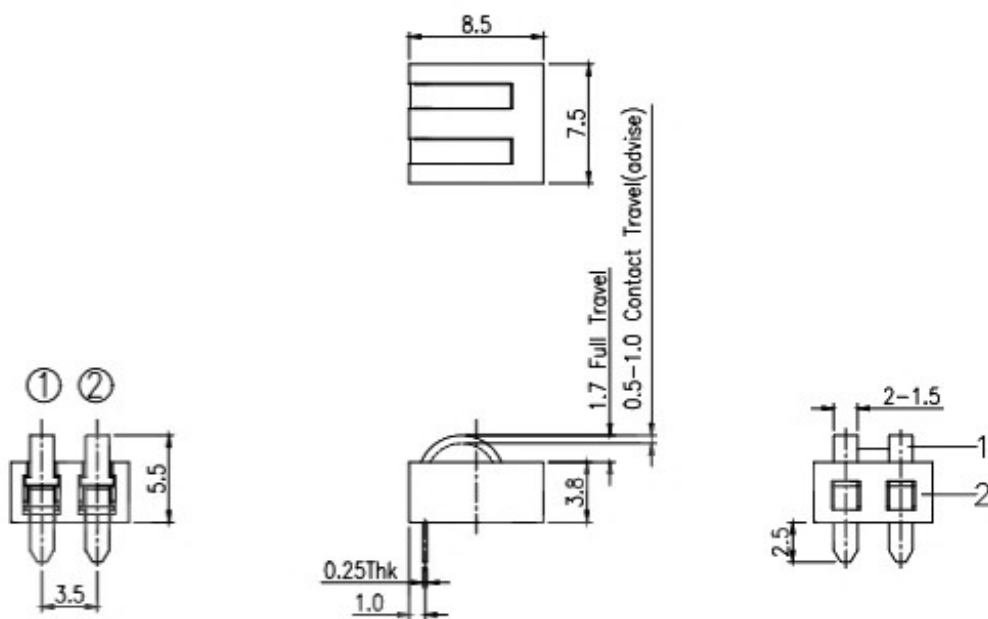

P.C.B LAYOUT

CIRCUIT

2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	2	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



**东莞市溪榜电子有限公司**

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	CONNECTOR			DRAWING	G.C.Chen	DWG.No.	SBICL5
PART NO.				CHECK	G.C.Chen	REV.	A0
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	08-01-2016
	mm	OTHERWISE	ABOVE 5 ~30	±0.3			
			ABOVE 30	±0.5	SCALE	2:1	PAGE
			ANGLE	±3'			1 OF 1