
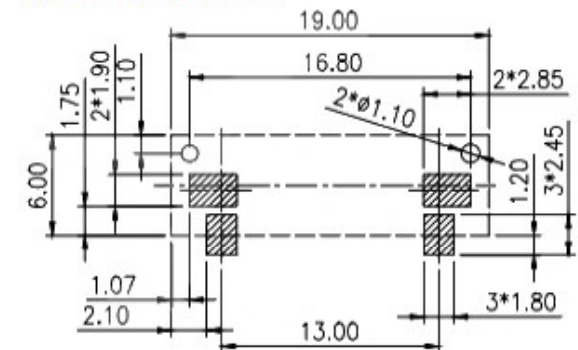


MATERIALS

- 1.HOUSING:HI/TEMP.
 - 2.TERMINAL:COPPER ALLOY(T=0.20mm).GOLD PLATED OVER NICKEL.
 - 3.SHELL:STAINLESS STEEL(T=0.20mm)
- SPECIFICATION
- 1.CURRENT RATING:1.5 A. MAX
 - 2.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC R.M.S. FOR ONE MINUTE.
 - 3.INSULATION RESISTANCE:500MΩ MIN. AT 250V DC.
 - 4.CONTACT RESISTANCE: 100mΩ MAX
 - 5.OPERATING TEMPERATURE: -40°C TO +105°C
 6. CONTACT FORCE:160gfmin WHEN STROKE OF1.5mm
 7. HOUSING BROKEN FORCE 2.0KGmin

PACKAGE: TAPE/REEL

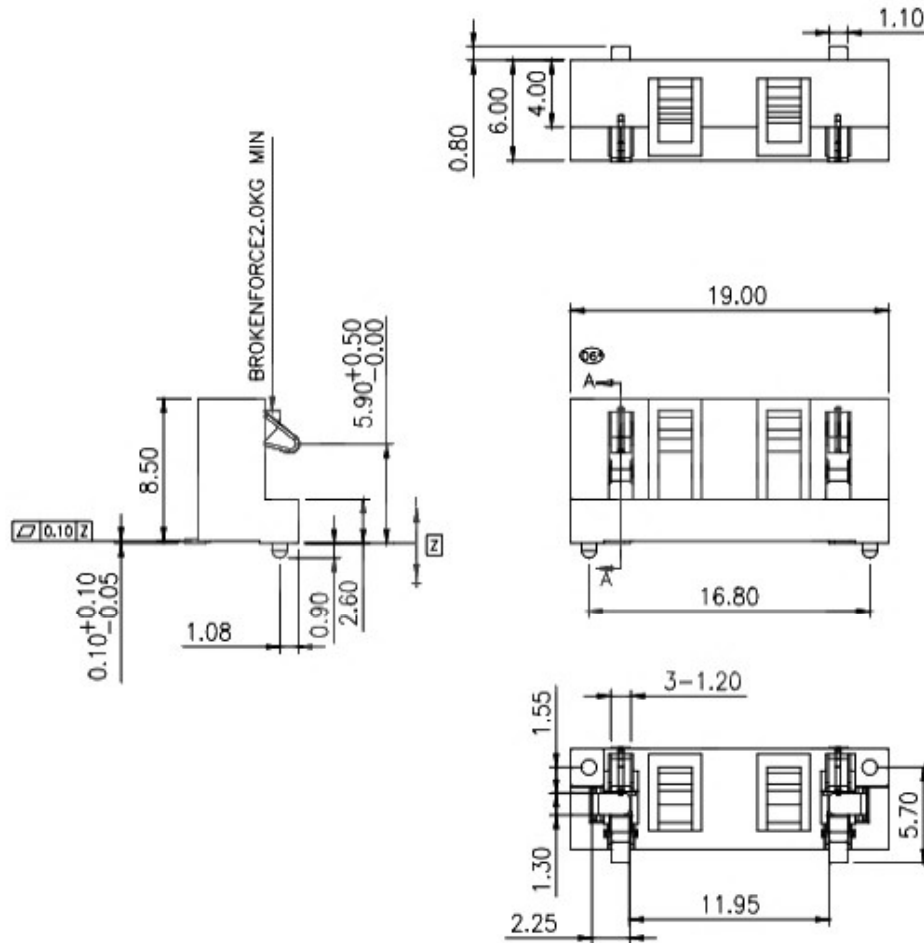

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
③	焊錫端子	C2680-H		
②	接觸端子	C5210R-EH	GOLD	
①	膠芯	PA9T	BLACK	UL94-V0

 东莞市溪榜电子有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING		Y.C,ZHANG		DWG.No.		SBICL	
PART NO.					CHECK		G.C.Chen		REV.		A1	
UNIT : mm		TOLERANCE OTHERWISE			APPROVAL		DATE		PAGE		23-07-2016	
		UP TO 5 ±0.2 ABOVE 5 ~30 ±0.3 ABOVE 30 ±0.5 ANGLE ±3°			SCALE		2:1		PAGE		1 OF 1	