

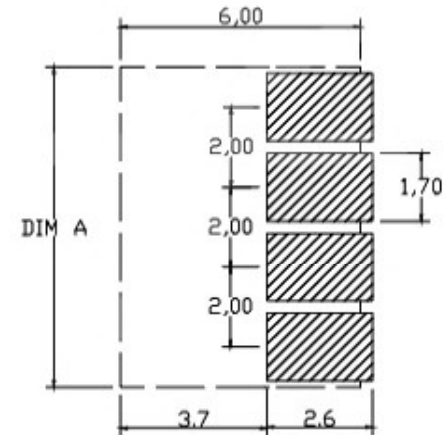
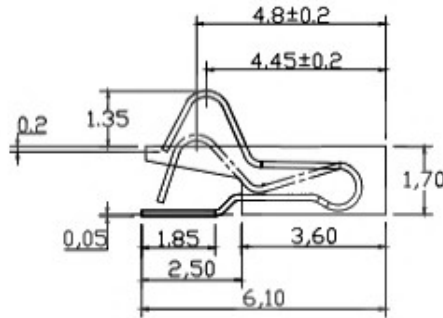


性能:

额定电流: 2.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 500MΩ
 工作温度: -40℃~+85℃
 塑件(材质): LCP
 接触点(材质): 磷铜, 触点镀金3U",
 使用寿命: 5000次以上

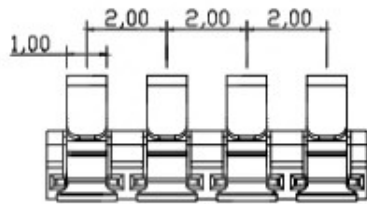

RECOMMENDED PCB LAYOUT
 TOP VIEW (. XX±0.05)

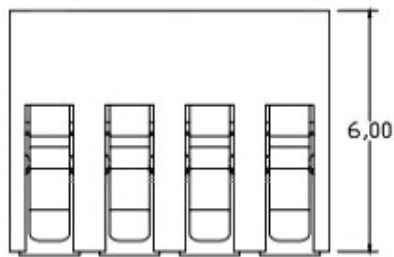

Pin数	PART NO.	DIM A
2Pin	BC2P20H31	4.0
3Pin	BC3P20H31	6.0
4Pin	BC4P20H31	8.0
5Pin	BC5P20H31	10.0
6Pin	BC6P20H31	12.0
7Pin	BC7P20H31	14.0
8Pin	BC8P20H31	16.0

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE	UP TO 5	±0.2	APPROVAL	SCALE	DATE	12-01-2014
	OTHERWISE	ABOVE 5 ~30	±0.3			PAGE	1 OF 1
		ABOVE 30	±0.5		2:1		
		ANGLE	±3°				