

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V




接触电阻: 30mΩ

绝缘电阻: 500MΩ


工作温度: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

塑件(材质): LCP 黑色

接触点(材质): 铜合金

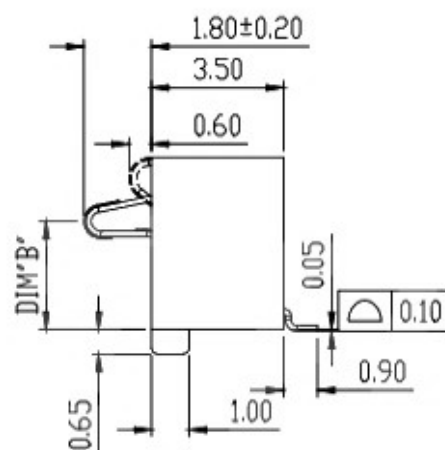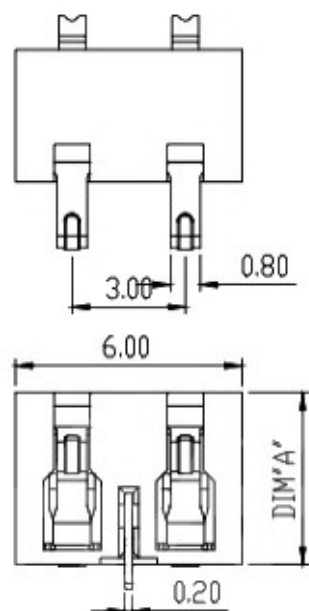

规格型号	DIM A	DIM B
BC2P30H72-C06	7.2	5.5
BC2P30H65-C06	6.5	4.8
BC2P30H50-C06	5.0	3.3
BC2P30H46-C06	4.6	2.9

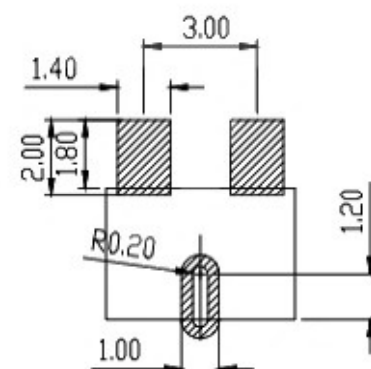RECOMMENDED PCB LAYOUT
TOL: (± 0.05)

东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR			DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL		DATE	
		ABOVE 5 ~ 30	±0.3				
		ABOVE 30	±0.5	SCALE	2:1	PAGE	1 OF 1
		ANGLE	0°±3'				