


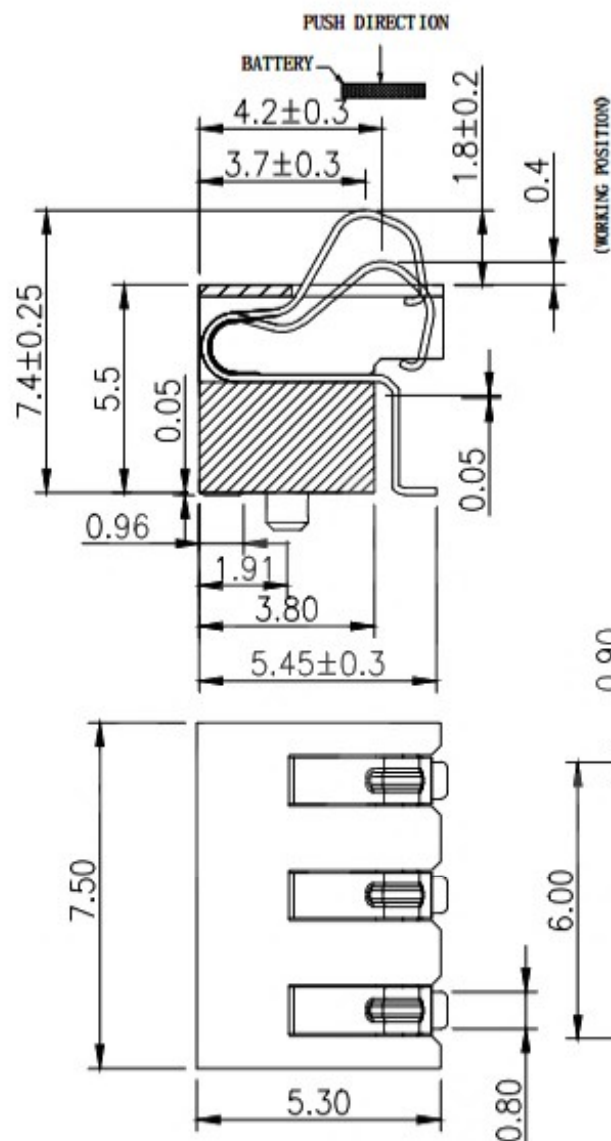

PART NO.	DIM A	DIM B
BC3P25H40F	4.0	5.90±0.2
BC3P25H45F	4.5	6.40±0.2
BC3P25H55F	5.5	7.40±0.2

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V



接触电阻: 30mΩ 以内

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金3U"

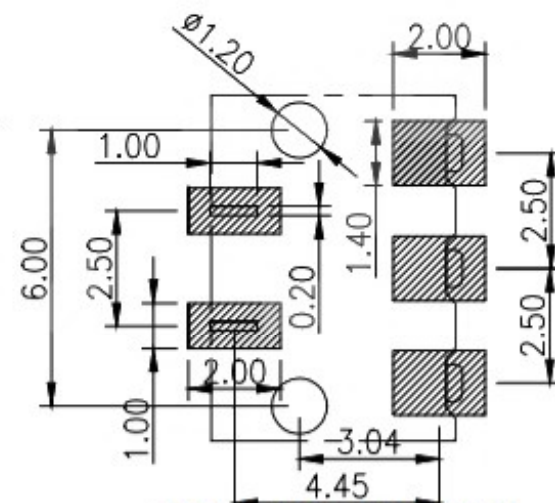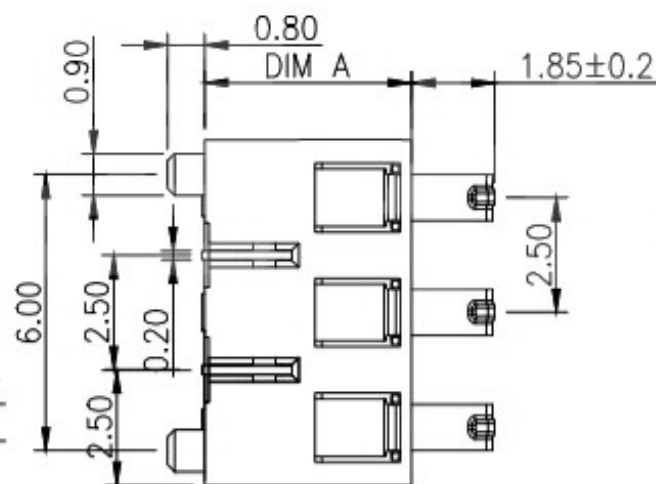

RECOMMENDED PCB LAYOUT

TOP VIEW(. XX±0.05)



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT :	mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL	DATE	PAGE
			ABOVE 5~30	±0.3			
UNIT :	mm	TOLERANCE OTHERWISE	ABOVE 30	±0.5	SCALE	2:1	1 OF 1
			ANGLE	±3°			