

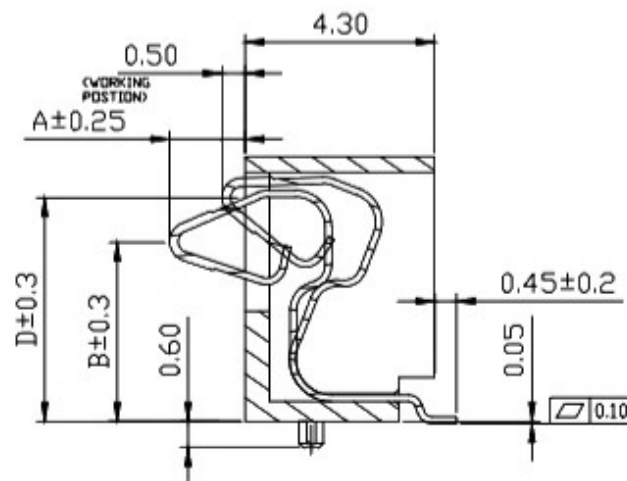
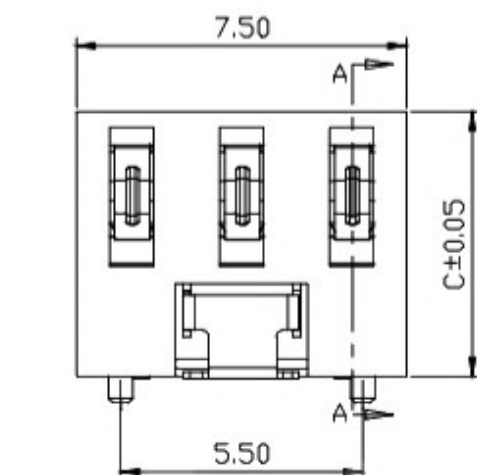


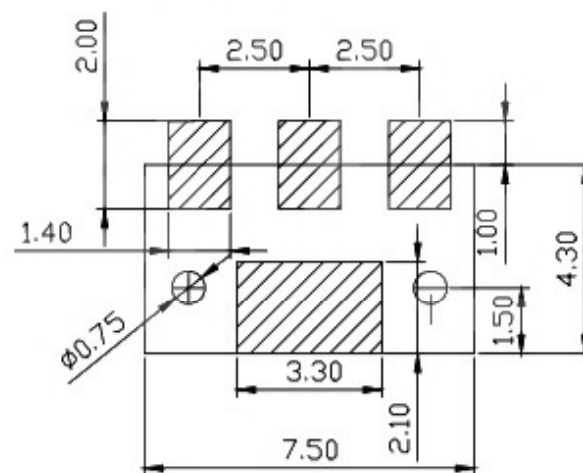

SECTION A-A

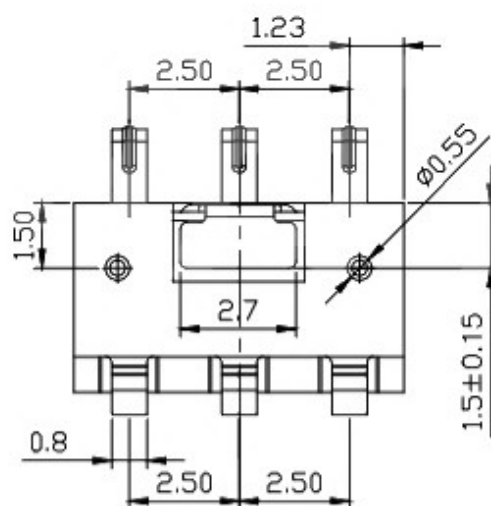

RECOMMENDED PCB LAYOUT

TOP VIEW (.XX±0.05)

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

| PART NO.  | A    | B   | C   | D   |
|-----------|------|-----|-----|-----|
| BC3P25H60 | 1.85 | 4.5 | 6.0 | 5.2 |
| BC3P25H70 | 1.85 | 5.5 | 7.0 | 6.2 |



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

|                                                                                       |        |                        |                                             |                             |       |          |           |         |            |
|---------------------------------------------------------------------------------------|--------|------------------------|---------------------------------------------|-----------------------------|-------|----------|-----------|---------|------------|
| PART NAME                                                                             |        | CONNECTOR              |                                             |                             |       | DRAWING  | Y,C,ZHANG | DWG.No. | SBICL      |
| PART NO.                                                                              |        |                        |                                             |                             |       | CHECK    | G.C.Chen  | REV.    | A1         |
|  | UNIT : | TOLERANCE<br>OTHERWISE | UP TO 5<br>ABOVE 5 ~30<br>ABOVE 30<br>ANGLE | ±0.2<br>±0.3<br>±0.5<br>±.3 | ANGLE | APPROVAL |           | DATE    | 14-03-2013 |
|                                                                                       | mm     |                        |                                             |                             |       |          | SCALE     | 2:1     | PAGE       |