

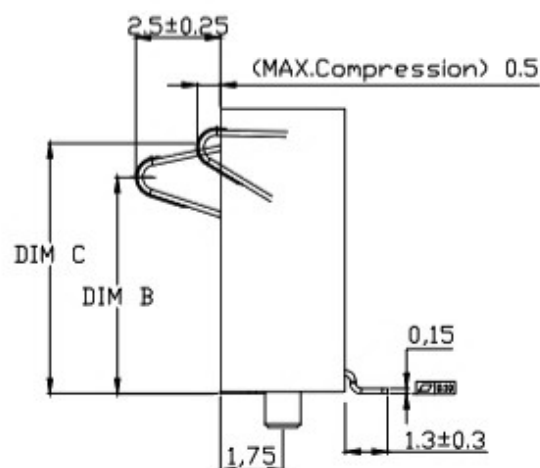
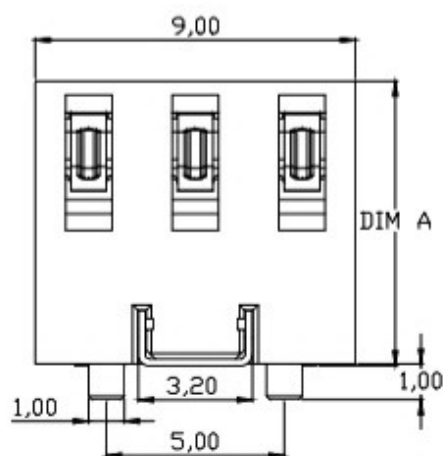
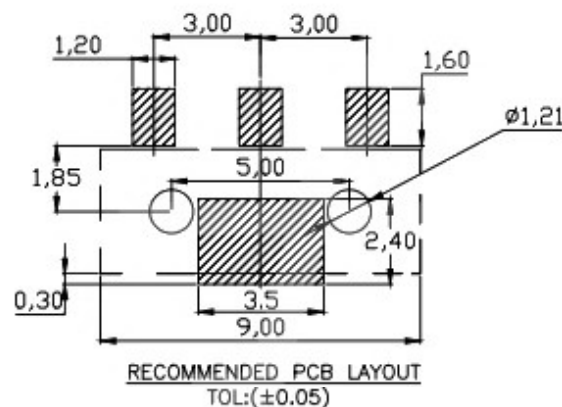


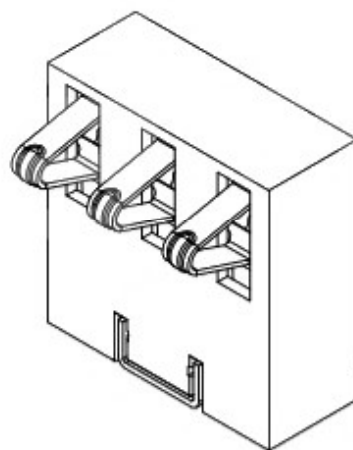

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 20V 3A max
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITIAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
2. LIFE TEST:MECHANICAL LIFE TEST 10,000 CYCLES MIN
3. TEMPERATURE RISE : 30°C MAX

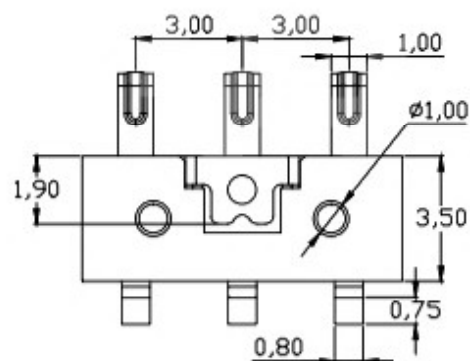

规格型号	DIM A	DIM B	DIM C
BC3P30H80	8.0±0.15	5.9±0.3	6.9±0.3
BC3P30H90	9.0±0.15	6.9±0.3	7.9±0.3
BC3P30H100	10.0±0.15	7.9±0.3	8.9±0.3



东莞市溪榜电子有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.					CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±.3	ANGLE 0°±3°	APPROVAL		DATE	10-10-2011
					SCALE	2:1	PAGE	1 OF 1