

F

E

D

C

B

A

RoHS
Compliant

SYMBOL








REVISION

APPROVAL

DATE

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 3A
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

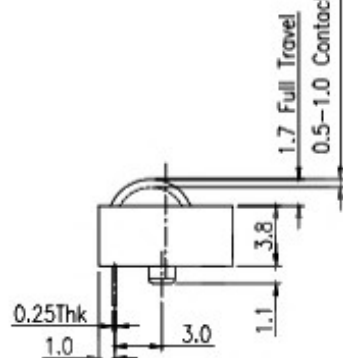

P.C.B LAYOUT

CIRCUIT

| | | | | |
|-----|------------------|----------|------|-----------|
| 2 | HOUSING | PPA | 1 | BLACK |
| 1 | CONTACT TERMINAL | C70350 | 3 | Au PLATED |
| NO. | PARTS | MATERIAL | QTY. | FINISHING |



东莞市溪榜电子有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

| | | | | | | | | | | | |
|-----------|----|------------------------|------------|---------|-------|----------|--|---------|------------|--------|--------|
| PART NAME | | CONNECTOR | | DRAWING | | G.C.Chen | | DWG.No. | | SBICL5 | |
| PART NO. | | | | CHECK | | G.C.Chen | | REV. | | A0 | |
| UNIT : | mm | TOLERANCE OTHERWISE | UP TO 5 | ±0.2 | ANGLE | APPROVAL | | DATE | 08-01-2016 | PAGE | 1 OF 1 |
| | | | ABOVE 5~30 | ±0.3 | | | | | | | |

F

E

D

C

B

A