


性能:

额定电流: 5.0A  
 额定电压: 30V  
 耐电压: 500V  
 接触电阻: 50mΩ Max  
 绝缘电阻: 500MΩ Min  
 工作温度: -40℃~+85℃  
 塑件(材质): LCP  
 接触点(材质): 磷铜, 触点镀金3U",  
 使用寿命: 5000次以上

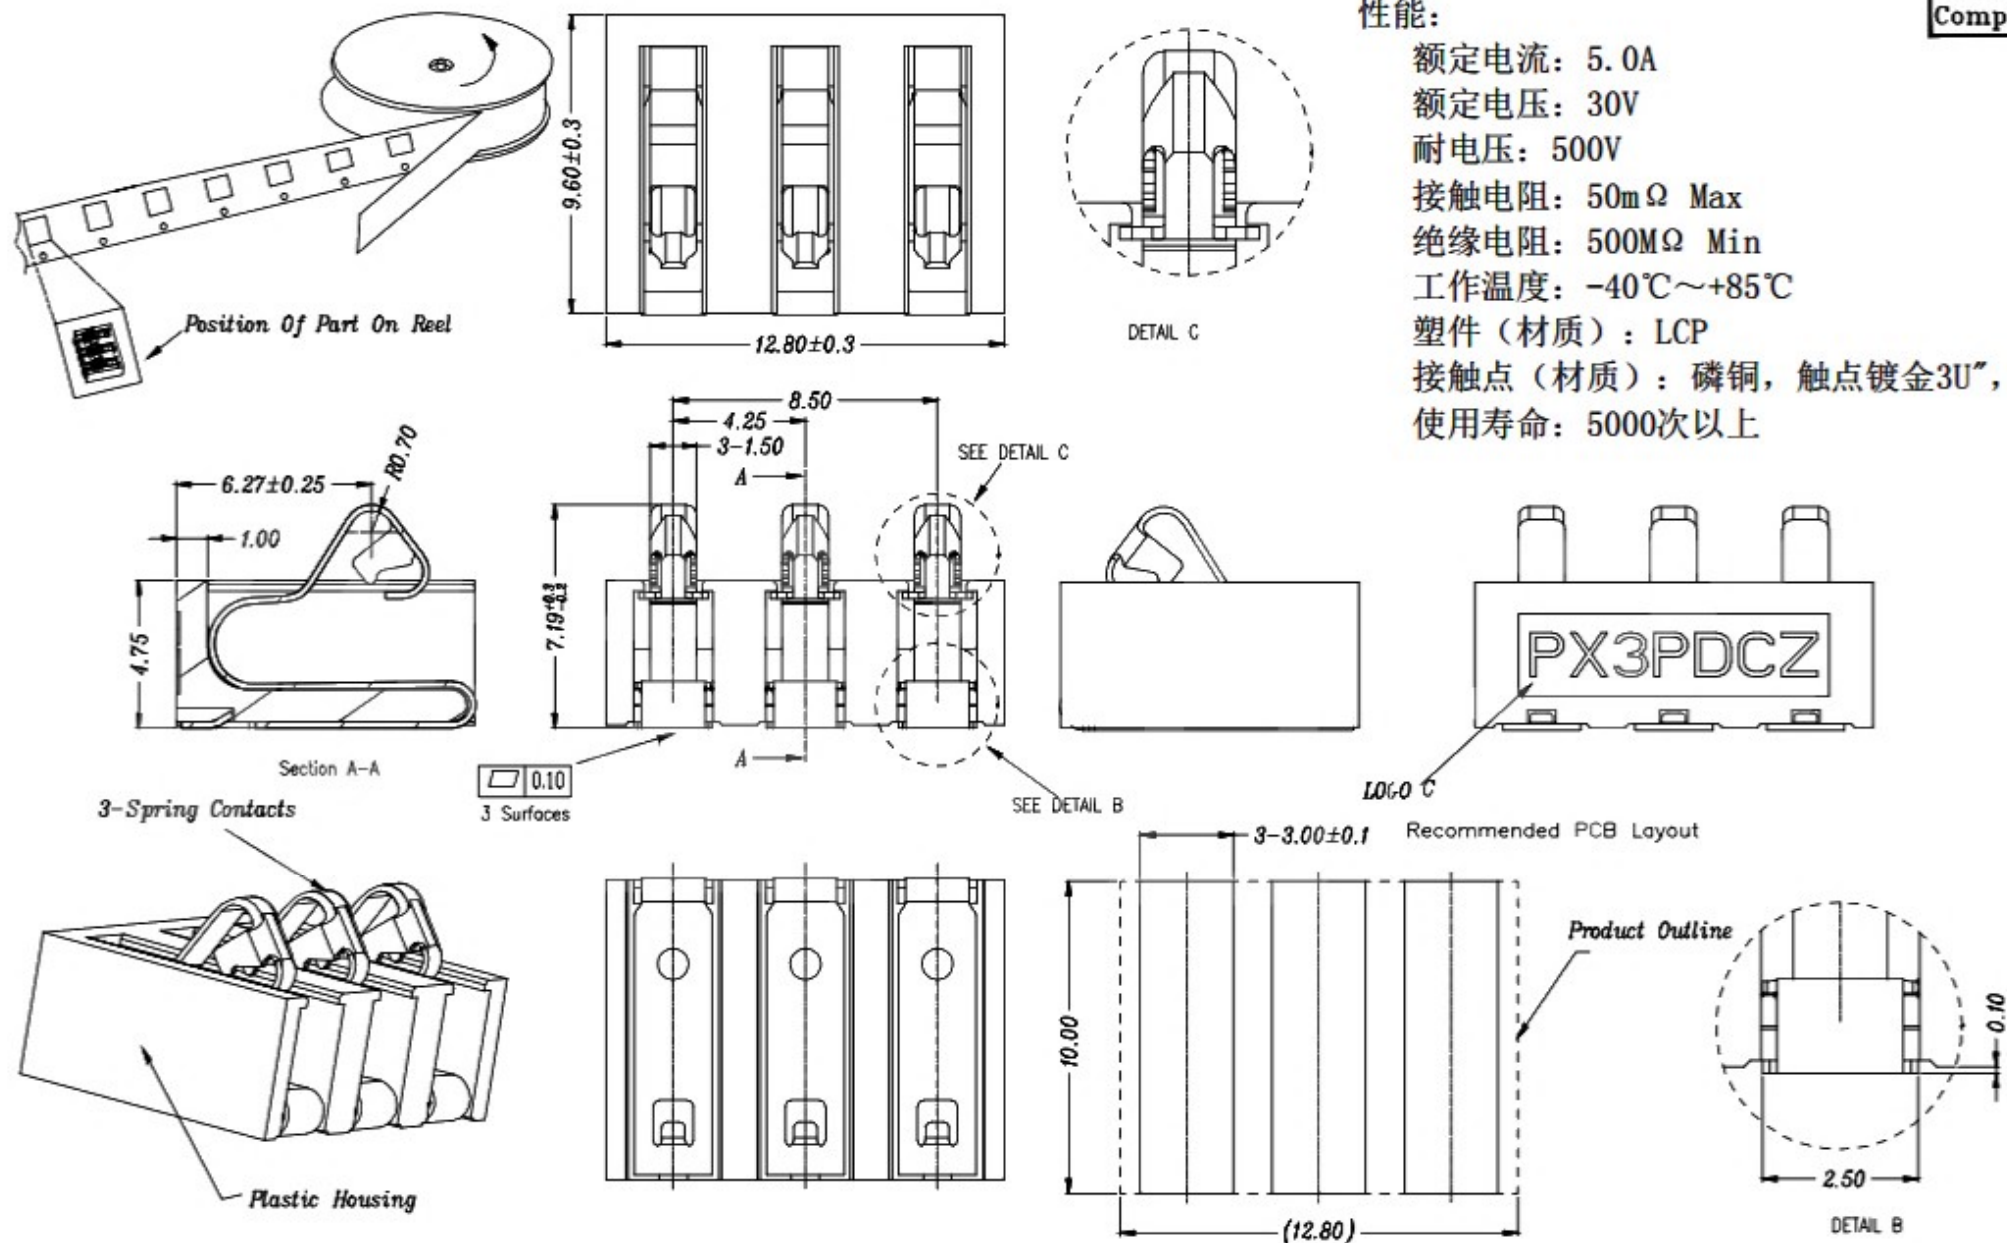

PART NAME		CONNECTOR		DRAWING		Y,C,ZHANG		DWG.No.		SBICL	
PART NO.				CHECK		G.C.Chen		REV.		A1	
UNIT :	mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	11-05-2014		
			ABOVE 5 ~ 30	±0.3					0°±3'	PAGE	
			ABOVE 30	±0.5		SCALE	2:1		1 OF 1		
			ANGLE	±0.3							