
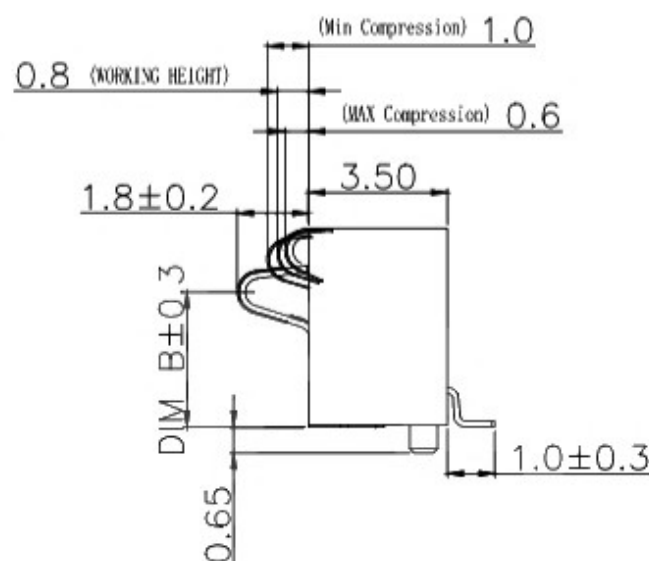
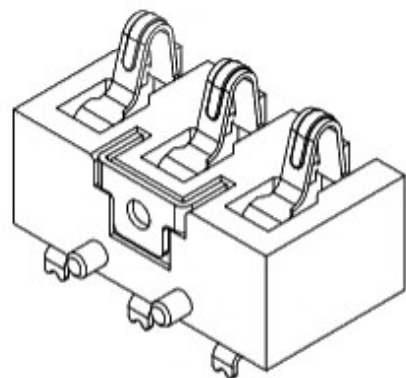
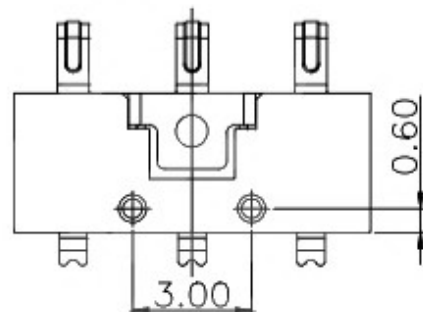


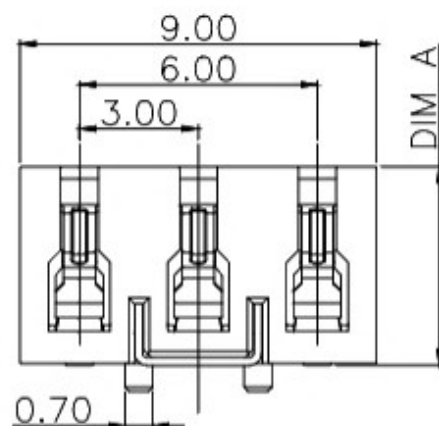

规格	DIM A	DIM B
BC3P3QH720D	7.2	5.7
BC3P3QH680D	6.8	5.3
BC3P3QH600D	6.0	4.5
BC3P3QH540D	5.4	3.9
BC3P3QH500D	5.0	3.5
BC3P3QH460D	4.6	3.1

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V


接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

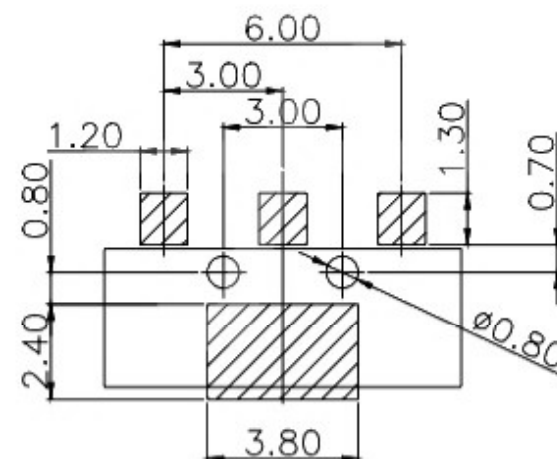RECOMMENDED PCB LAYOUT
TOL: (±0.05)

东莞市溪榜电子有限公司

COPYRIGHT RESERVED PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.						CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL		DATE	10-06-2012
	mm								SCALE