
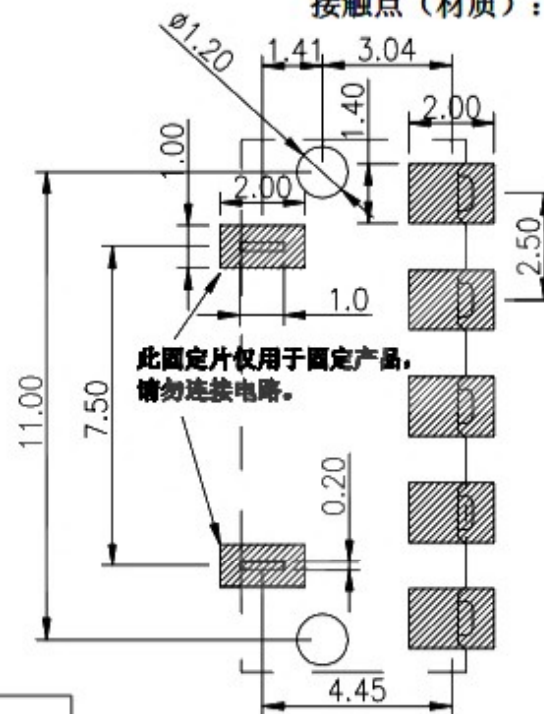
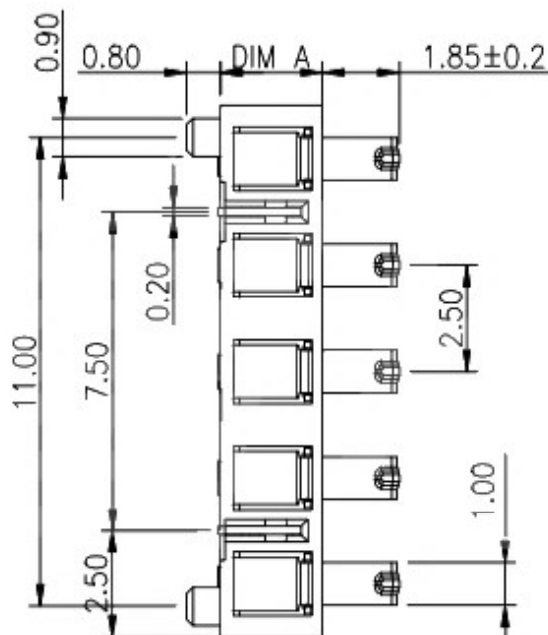


性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金

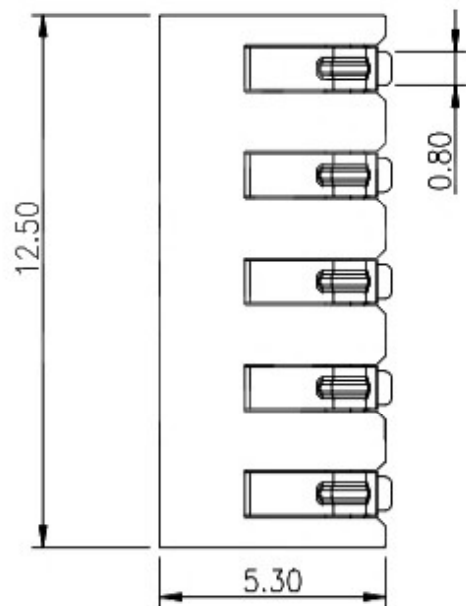

PART NO.	DIM A	DIM B
BC5P25H43	2.4	4.30±0.2
BC5P25H49	3.0	4.90±0.2
BC5P25H54	3.5	5.40±0.2

RECOMMENDED PCB LAYOUT  
TOP VIEW(. XX±0.05)

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	APPROVAL		DATE	14-03-2013
		ABOVE 5 ~ 30	±0.3			PAGE	1 OF 1
		ABOVE 30	±0.5	SCALE	2:1		
		ANGLE	±0.5				