

F

E

D

C

B

A

RoHS
Compliant

SYMBOL







REVISION

APPROVAL


DATE

SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 3A
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN, MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

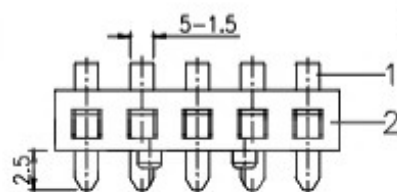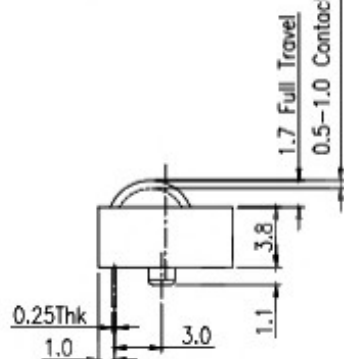

P.C.B LAYOUT



CIRCUIT

2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	5	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		G.C.Chen		DWG.No.		SBICL5	
PART NO.				CHECK		G.C.Chen		REV.		A0	
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL			DATE	08-01-2016		
		ABOVE 5~30	±0.3		SCALE	2:1	PAGE	1 OF 1			
mm	OTHERWISE	ABOVE 30	±0.5	0°±3'							

F

E

D

C

B

A