


PART No.	PIN	A	B	C
CL-038-5P	5P	15.3	14.5	12.9
CL-038-3P	3P	10.3	9.5	7.9



CIRCUIT

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V






接触电阻: 30mΩ

绝缘电阻: 500MΩ


工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

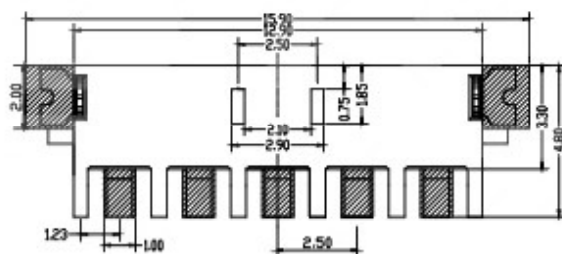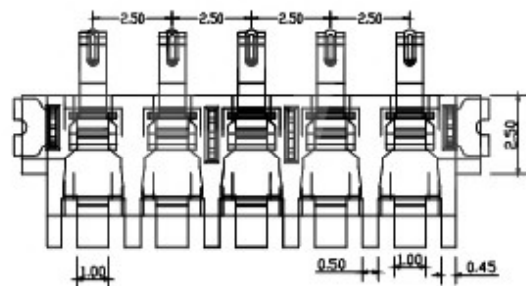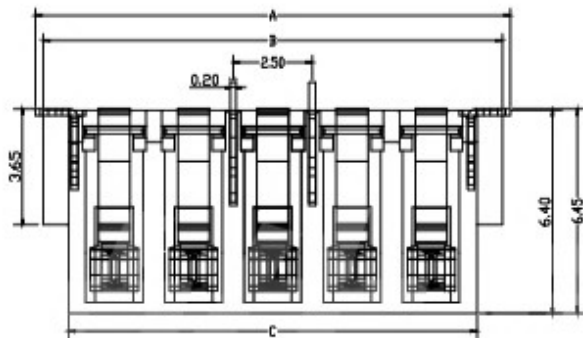

PCB LAYOUT (5pin)

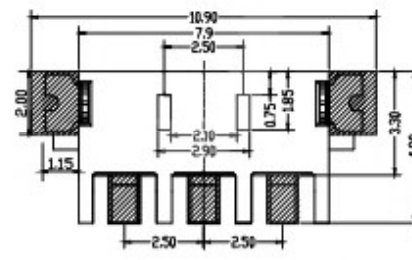

PCB LAYOUT (3pin)

3	PEG	BRASS	1	Sn PLATED
2	HOUSING	LCP	1	BLACK
1	TERMINAL	C5210	X	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		Y.C.ZHANG		DWG.No.		SBICL	
PART NO.				CHECK		G.C.Chen		REV.		A1	
UNIT :	mm	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	14-03-2013		
		OTHERWISE	ABOVE 5 ~ 30	±0.3					SCALE	2:1	PAGE