

## 性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

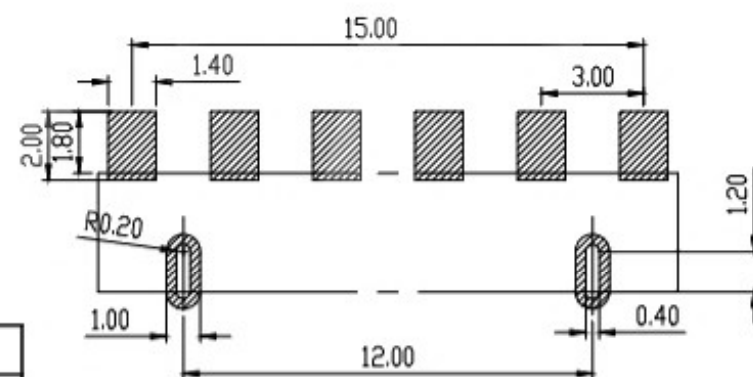
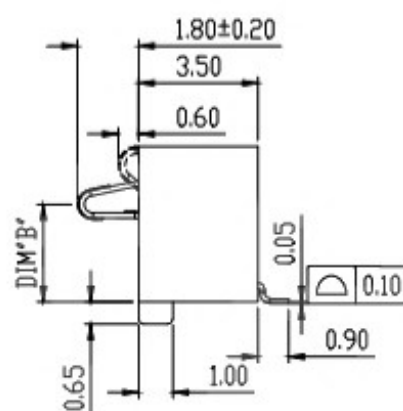
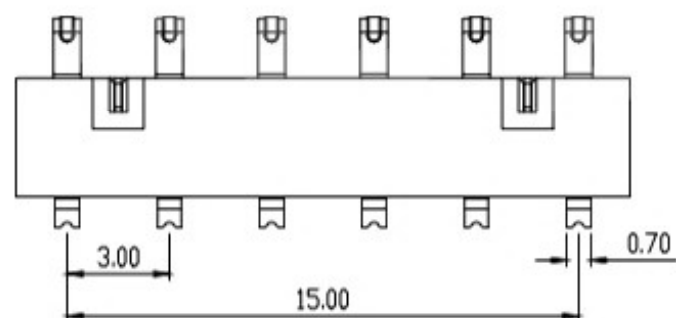
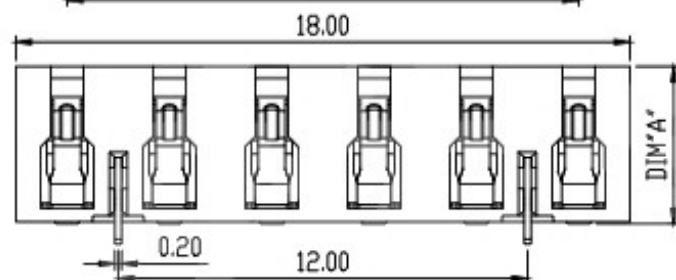
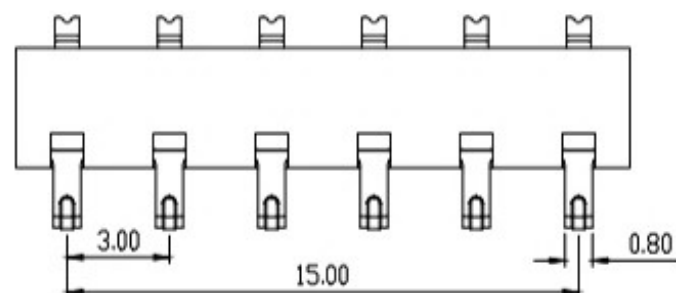
接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 

塑件(材质): LCP 黑色

接触点(材质): 铜合金

RECOMMENDED PCB LAYOUT  
TOL: ( $\pm 0.05$ )

| 规格型号          | DIM A | DIM B |
|---------------|-------|-------|
| BC6P30H72-C06 | 7.2   | 5.5   |
| BC6P30H65-C06 | 6.5   | 4.8   |
| BC6P30H50-C06 | 5.0   | 3.3   |
| BC6P30H46-C06 | 4.6   | 2.9   |



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

|           |        |                        |              |         |           |         |        |
|-----------|--------|------------------------|--------------|---------|-----------|---------|--------|
| PART NAME |        | CONNECTOR              |              | DRAWING | Y.C.ZHANG | DWG.No. | SBICL  |
| PART NO.  |        |                        |              | CHECK   | G.C.Chen  | REV.    | A1     |
|           | UNIT : | TOLERANCE<br>OTHERWISE | UP TO 5      | ±0.2    | APPROVAL  | DATE    | PAGE   |
|           | mm     |                        | ABOVE 5 ~ 30 | ±0.3    |           |         |        |
|           |        |                        | ABOVE 30     | ±0.5    | SCALE     | 2:1     | 1 OF 1 |
|           |        |                        | ANGLE        | ±3°     |           |         |        |