

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

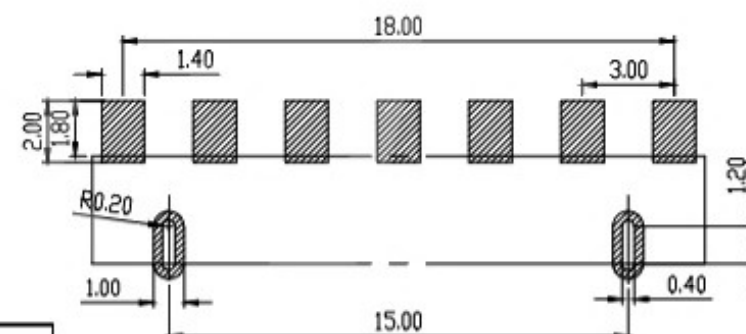
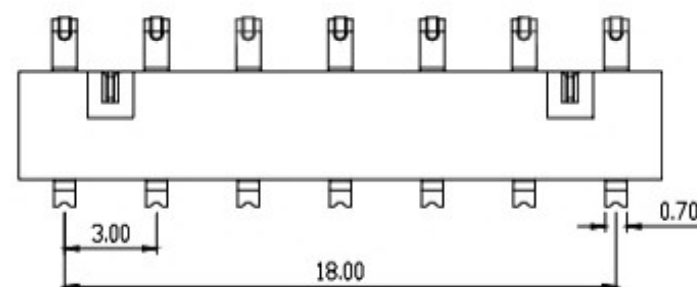
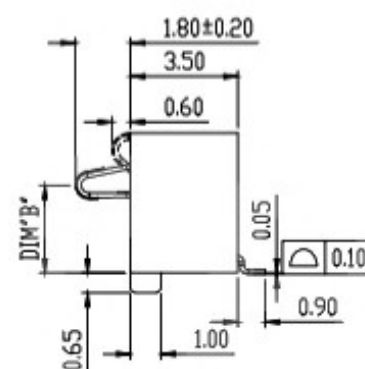
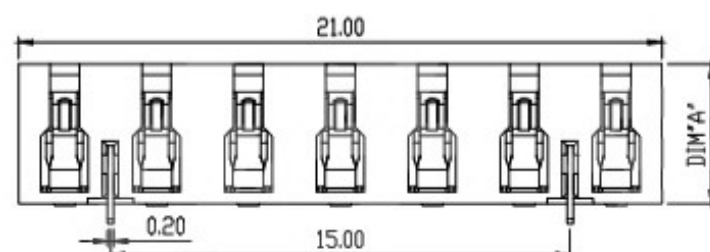
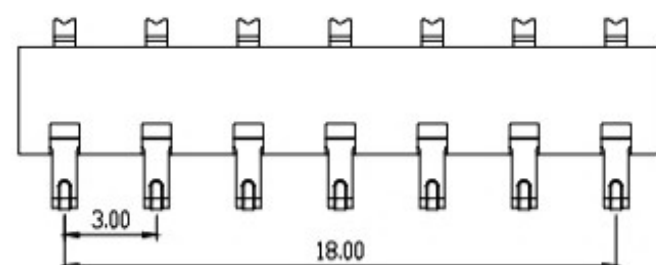
接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP 黑色

接触点(材质): 铜合金

RECOMMENDED PCB LAYOUT
TOL:(<±0.05)

规格型号	DIM A	DIM B
BC7P30H72-C06	7.2	5.6
BC7P30H65-C06	6.5	4.9
BC7P30H50-C06	5.0	3.4
BC7P30H46-C06	4.6	3.0



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.					CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	
	mm		ABOVE 5 ~30	±0.3				
			ANGLE	±3°	SCALE	2:1	PAGE	1 OF 1