
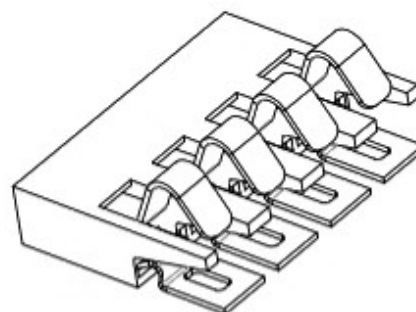


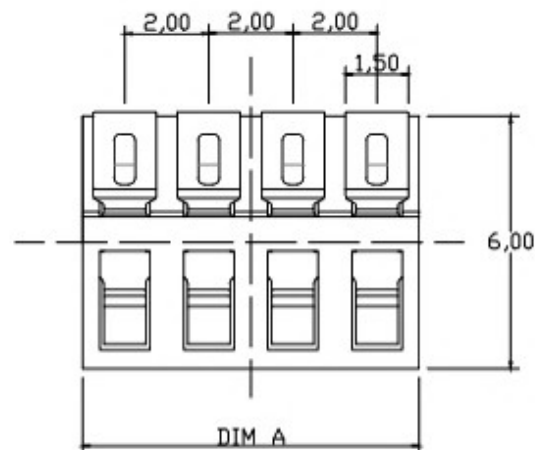

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ





绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金3U",

使用寿命: 5000次以上

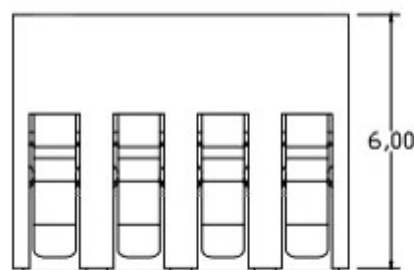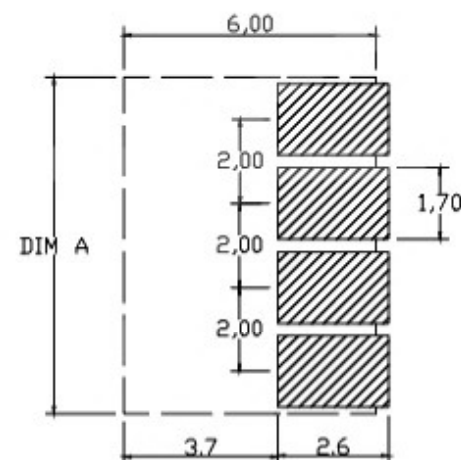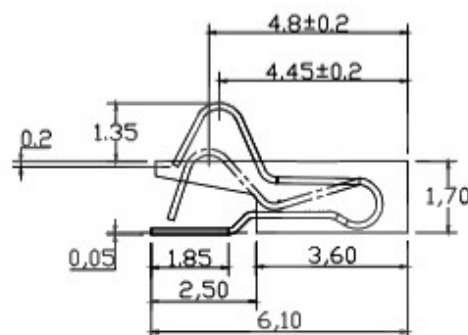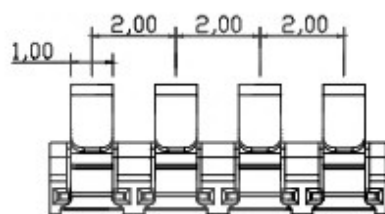

Pin数	PART NO.	DIM A
2Pin	BC2P20H31	4.0
3Pin	BC3P20H31	6.0
4Pin	BC4P20H31	8.0
5Pin	BC5P20H31	10.0
6Pin	BC6P20H31	12.0
7Pin	BC7P20H31	14.0
8Pin	BC8P20H31	16.0

RECOMMENDED PCB LAYOUT

TOP VIEW (. XX±0.05)



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.						CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±.3	ANGLE 0°±3°	APPROVAL		DATE	12-01-2014
	mm					SCALE	2:1	PAGE	1 OF 1