

性能:

额定电流: 1.0A

额定电压: 12V

耐电压: 500V







接触电阻: 30mΩ MAX

绝缘电阻: 500MΩ


工作温度: -40℃~+85℃

塑件(材质): LCP E130I

接触点(材质): 铜合金, 触点镀金15μ

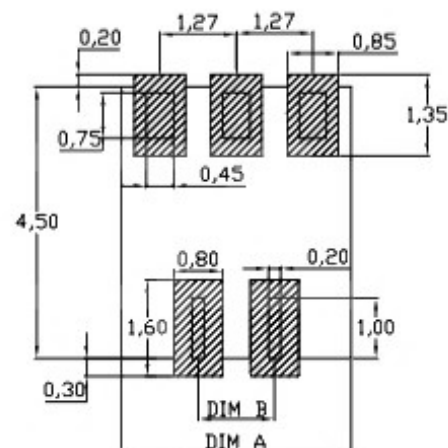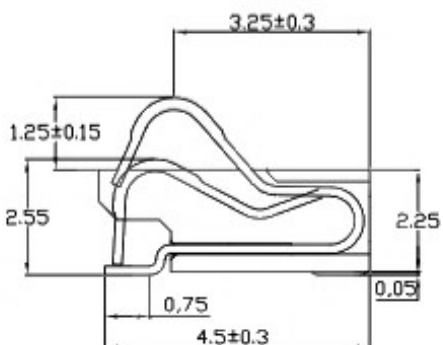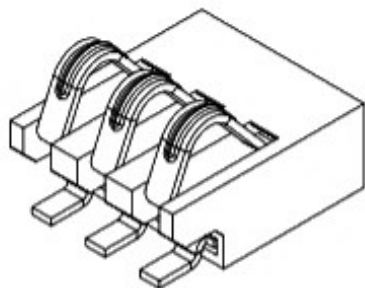

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX±0.05)

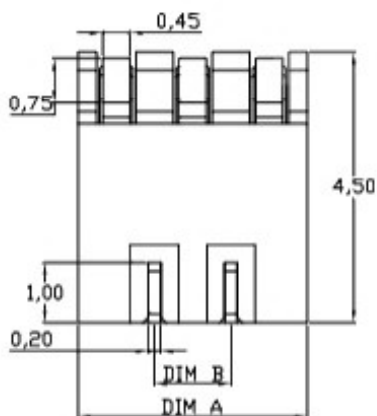

PART NO.	DIM A	DIM B
BC2P127H225	2.54	
BC3P127H225	3.81	1.27
BC4P127H225	5.08	2.54
BC5P127H225	6.35	3.81
BC6P127H225	7.62	5.08



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	APPROVAL		DATE	
				SCALE	2:1	PAGE	1 OF 1