

性能:

额定电流: 1.0A

额定电压: 12V



耐电压: 500V

接触电阻: $30\text{m}\Omega$ MAX绝缘电阻: $500\text{M}\Omega$ 工作温度: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$



塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金 $3\text{U}''$,

使用寿命: 3000次以上

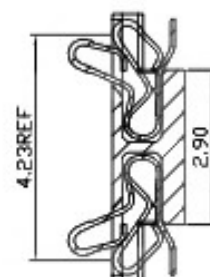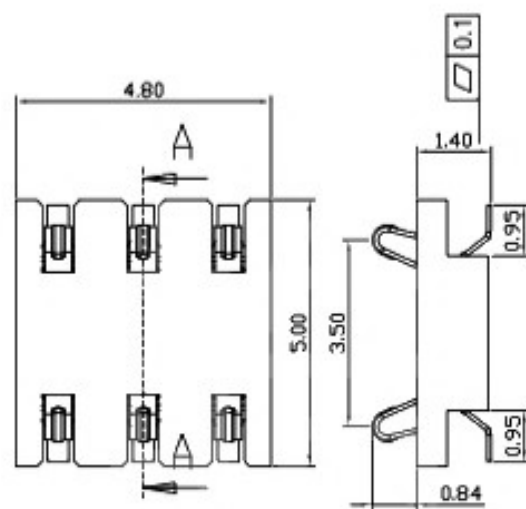

剖面 A-A

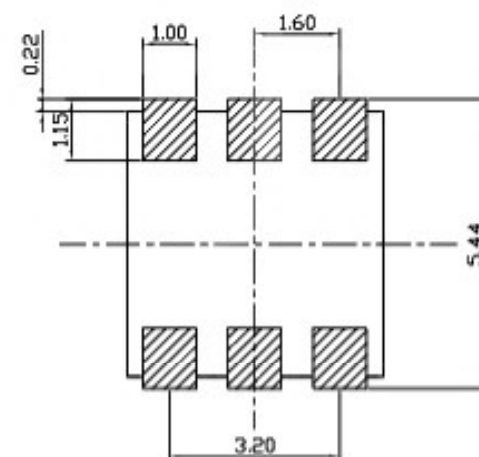RECOMMENDED PCB LAYOUT
TOL: (± 0.05)

东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y,C,ZHANG	DWG.No.	SBICL
PART NO.				CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	APPROVAL		DATE	
	mm		± 0.2 ± 0.3 ± 0.5 $\pm 3^{\circ}$	SCALE	2:1	PAGE	1 OF 1