

性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

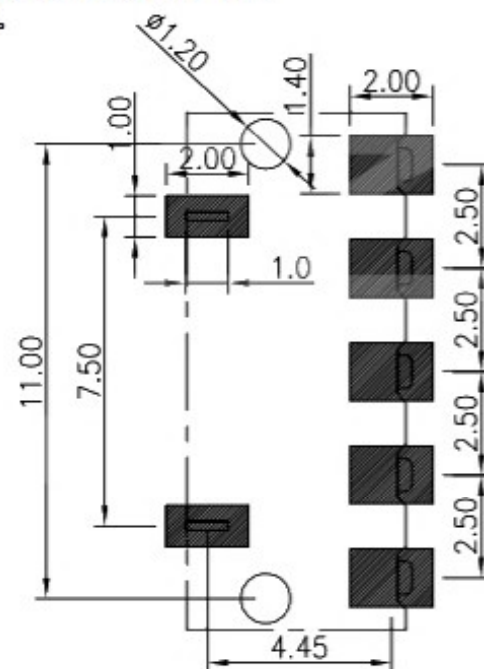
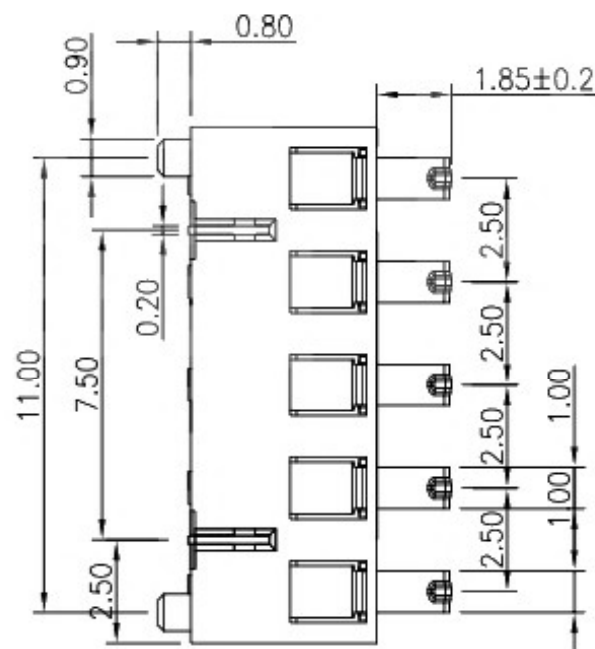
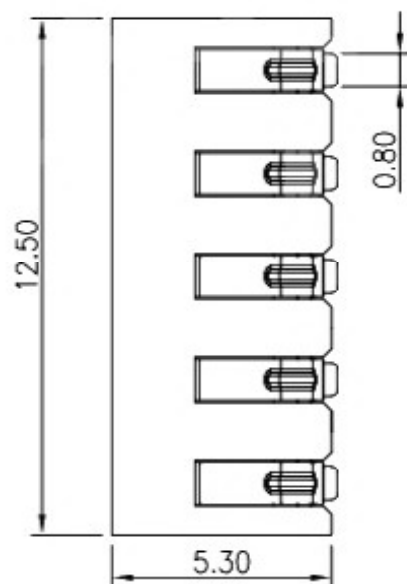
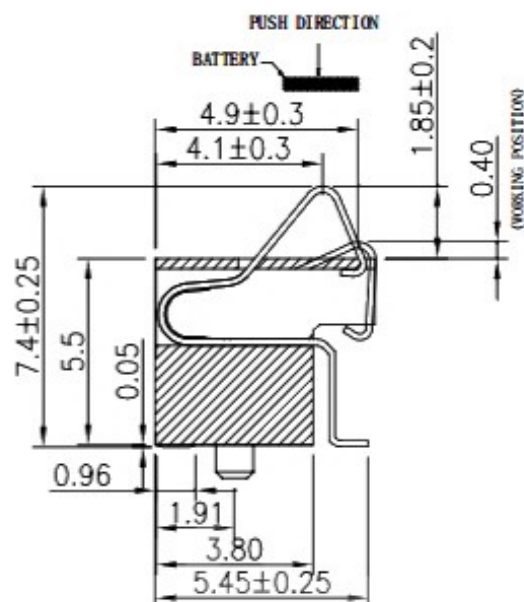
接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

使用寿命: 5000次以上

塑件(材质): LCP(黑色) UL94-V0

接触点(材质): 铜合金, 触点镀金3U",
焊脚镀金1U"固定片(材质): 黄铜C2680, 镀全雾锡70U"以上
环保要求: 符合ROHS限值。

RECOMMENDED PCB LAYOUT

TOP VIEW(.XX±0.05)



东莞市溪榜电子有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	Y.C,ZHANG	DWG.No.	SBICL
PART NO.						CHECK	G.C.Chen	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3	ANGLE	APPROVAL		DATE	
	mm						SCALE	2:1	PAGE