




SPECIFICATION

Contact Rating: 50mA, 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100mΩ min. 500V DC
 Dielectric Strength: 250V AC/1minute
 Travel: 0.25mm
 Operating Temp: -30°C~+85°C
 Storage Temp: -30°C~+80°C

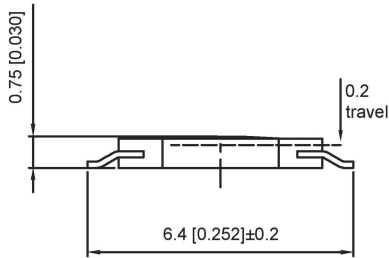

PAPT NO	TS-1187B-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:0.75

PCB Layout(pattern side)



4.4[0.17]

S[0.31]



Circuit Diagram

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
④	Dust Cover	—	1	Kapton Film	Yellow	—
③	Terminal	—	4	Brass (0.30t)	Plating silvering	—
②	Contact	—	1	F.ag/Sus	Natural	—
①	Base	—	1	Pa46	Black	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	units: mm	tolerance:	DSND	DATE	SCALE: N/A	MODEL TYPE:
ΔX					X.X	±0.2mm	DWN	DATE	VIEW:	TACT SWITCH
ΔX					X.XX	±0.1mm	CHKD	DATE	UNIT: mm/in	PART NO.:
ΔX					X.XXX	±0.05mm	APPD	DATE	SIZE: A4	DWG NO
						UNSPECIFIED TOLERANCES	DONG GUAN XI BANG ELECTRONIC CO., LTD			TS-1187B-X
							WEIGHT	SHEET	REVISION	
							1.0g	1/1	A0	