

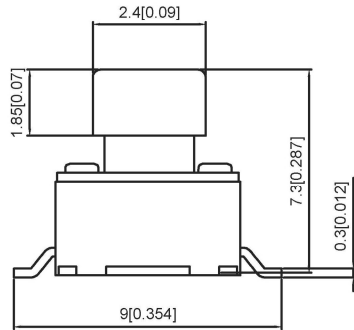
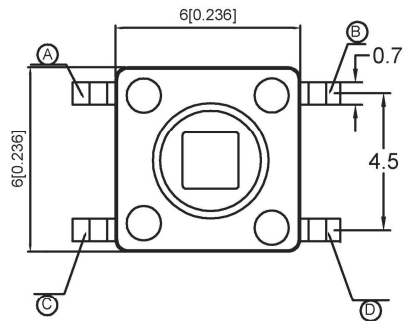


SCHEMATIC



Recommended P.C.B layout

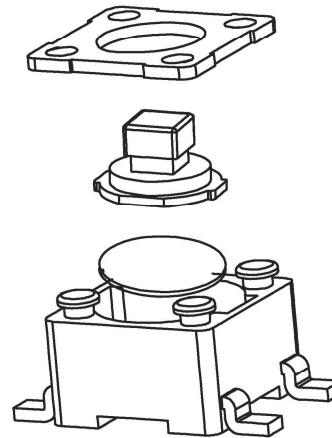

SPECIFICATION

Contact Rating:	50mA, 12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min. 500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃ ~ +85℃
Storage Temp:	-30℃ ~ +80℃

PAPT NO	TS-1102T-X
Operating Force	A:100gf B:160gf C:260gf
Height	D:7.3

⑤	Terminal	—	4	Brass (0.30t)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystone	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW:	PART NO.:		
Δx					tolerance:	CHKD		DATE		UNIT: mm/in	DWG NO		
Δx					X.X ±0.2mm	APPD		DATE		SIZE: A4	TS-1102T-X		
Δx					X.XX ±0.1mm								
MARK	DESCRIPTION			DATE	REVISED	APPROVED	X.XXX ±0.05mm						
REVISIONS						UNSPECIFIED TOLERANCES							
www.alpsr.com www.gdxdz.com www.xbswitch.com						DONG GUAN XI BANG ELECTRONIC CO., LTD					WEIGHT	SHEET	REVISION
											1.0g	1/1	A0

ΔX					units: mm
ΔX					tolerance: X.X ±0.2mm
ΔX					X.XX ±0.1mm
MARK					X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.alpsr.com www.gdxdz.com www.xbswitch.com					