

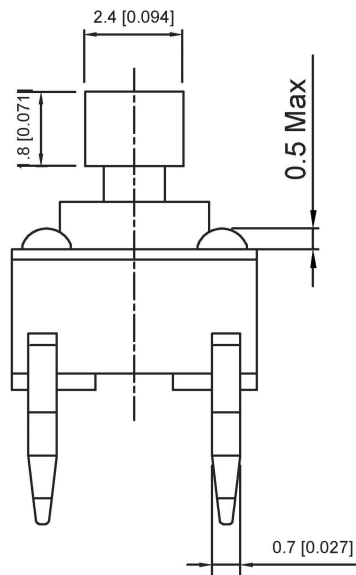


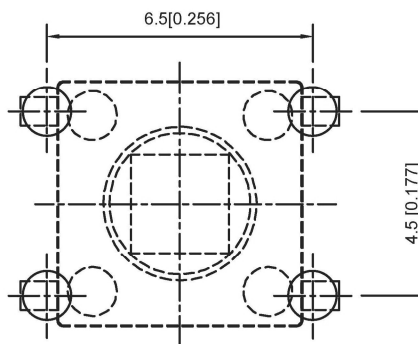

Contact Rating:	50mA,12V DC
Contact Resistance:	100mΩ max
Insulation Resistance:	100mΩ min.500V DC
Dielectric Strength:	250V AC/1minute
Travel:	0.25mm
Operating Temp:	-30℃~+85℃
Storage Temp:	-30℃~+80℃

The following soldering patterns are recommended for reflow soldering

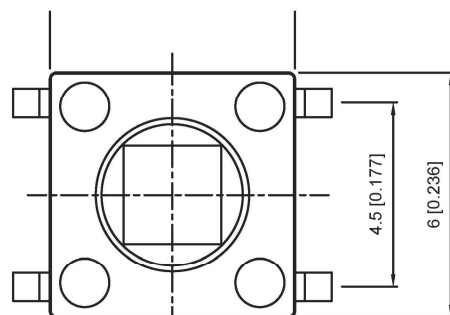

PAPT NO	TC-1102T-X
Operating force	A:100gf B:160gf C:260gf
Height	H: 7.3

⑤	Terminal	—	4	Brass (0.30T)	Plating silvering	—
④	Contact	—	1	F.ag/Sus	Natural	—
③	Base	—	1	Pa46		—
②	Cover	—	1	Spcc	Plating Nickel	—
①	Keystake	—	1	Pa46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMAR

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units:	mm	DWN		DATE		VIEW: 		PART NO.:	
Δ X					tolerance:		CHKD		DATE		UNIT: mm/in	DWG NO TC-1102T-X		
Δ X						X.X ± 0.2 mm							REVISIONS	
Δ X						X.XX ± 0.1 mm						UNSPECIFIED TOLERANCES		
MARK	DESCRIPTION			DATE	REVISED	APPROVED	X.XXX ± 0.05 mm	APPD		DATE	SIZE: A4		DONG GUAN XI BANG ELECTRONIC CO., LTD	
												WEIGHT 1.0a		SHEET 1/1
www.alpsr.com www.qdxidz.com www.xbswitch.com														