



SCHEMATIC

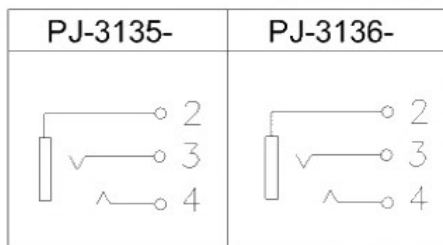


PJ-3135-

- SPECIFICATION**
- 1 Rating : DC 50V 10A
 - 2 Contact resistance : ≤30mΩ
 - 3 Insulation resistance : ≥100MΩ
 - 4 Withstand voltage : 500VAC
 - 5 Insertion and extraction force : 3-20N
 - 6 life test : 5,000 cycles

PJ-3136-

R:red	G:green
Y:yellow	B:black
W:white	T:transparent



	MATERIAL	PLATING
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Phosphor Bronze	tin
plastic	Pbt	

△X					ANGULAR	±5°
△X					X.X	±0.2mm
△X					X.XX	±0.1mm
△X					X.XXX	±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	
REVISIONS						

DSND	DATE	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.: PJ-313X-X
APPD	DATE	SIZE: A4	
东莞市溪榜电子有限公司			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0