

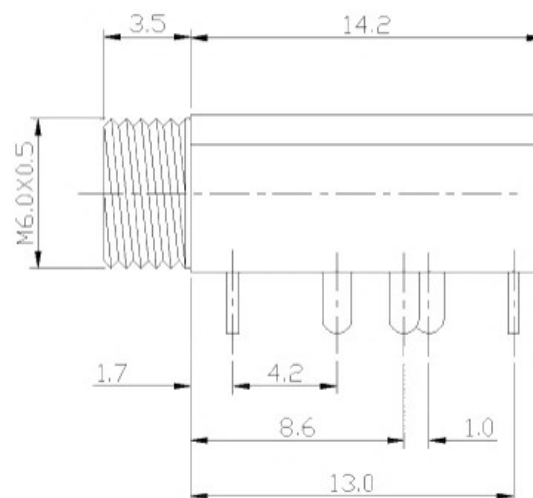


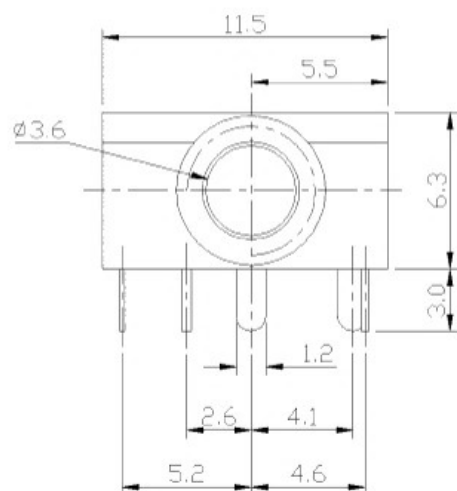

DC 30V 0.5A:
 2.Contact resistance: $\leq 0.03\Omega$;
 3.Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4.Withstand voltage: 500VAC ;
 5.Insertion and extraction force: 3-20N;
 6.life test: 5,000 cycles.

PJ-321M0	PJ-321M1	PJ-321M2	PJ-321M3

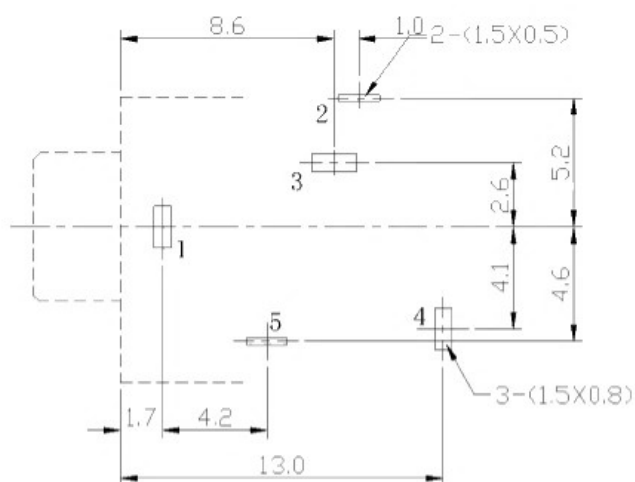

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Brass	tin
terminal 4	Brass	tin
terminal 5	Phosphor Bronze	tin
plastic	Pbt	

DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△ X					
△ X					
△ X					
REVISIONS					

东莞市溪榜电子有限公司

WEIGHT	SHEET	REVISION
1.0g	1/1	A0