


Temperature	-20~70 C
Rated Load	DC 30V 0.3A
Contact Resistance	<0.03Ω
Insulation Resistance	>100MΩ
Withstand Voltage	AC500V(50Hz)/min
Actuating Force	2.2~30N
Life	5000次

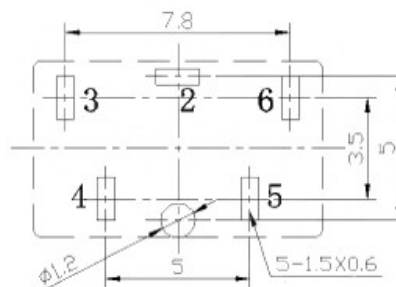

Model No.	PJ-3582-	PJ-3583-
Schematic		
color	B:Black W:White	

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	silver
terminal 3	Phosphor Bronze	silver
terminal 4	Phosphor Bronze	silver
terminal 5	Phosphor Bronze	silver
terminal 6	Phosphor Bronze	silver
plastic	Pbt	

						DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK	
ΔX						DWN		DATE		VIEW:	PART NO.:	
ΔX						CHKD		DATE		UNIT: mm	DWG NO.:	
ΔX						APPD		DATE		SIZE: A4		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	<b>东莞市溪榜电子有限公司</b>			WEIGHT	SHEET	REVISION	
	REVISIONS									1.0g	1/1	A0