
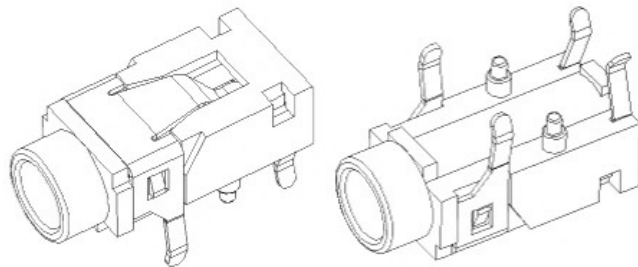


ø3.50mm 3 POLE PLUG

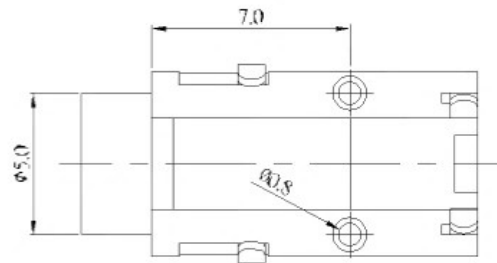

SPECIFICATION

1. Rating : DC 30V 0.5A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles °

MODEL NO.	PJ-3733
SCHEMATIC	

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
plastic	Pbt	

					ANGLAR	±5°	DSND		DATE		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
ΔX					X.X	±0.2mm	DWN		DATE		VIEW:	PART NO.:		
ΔX					X.XX	±0.1mm	CHKD		DATE		UNIT: mm	DWG NO.:		
ΔX					X.XXX	±0.05mm	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES							WEIGHT	SHEET	REVISION
REVISIONS												1.0g	1/1	A0