


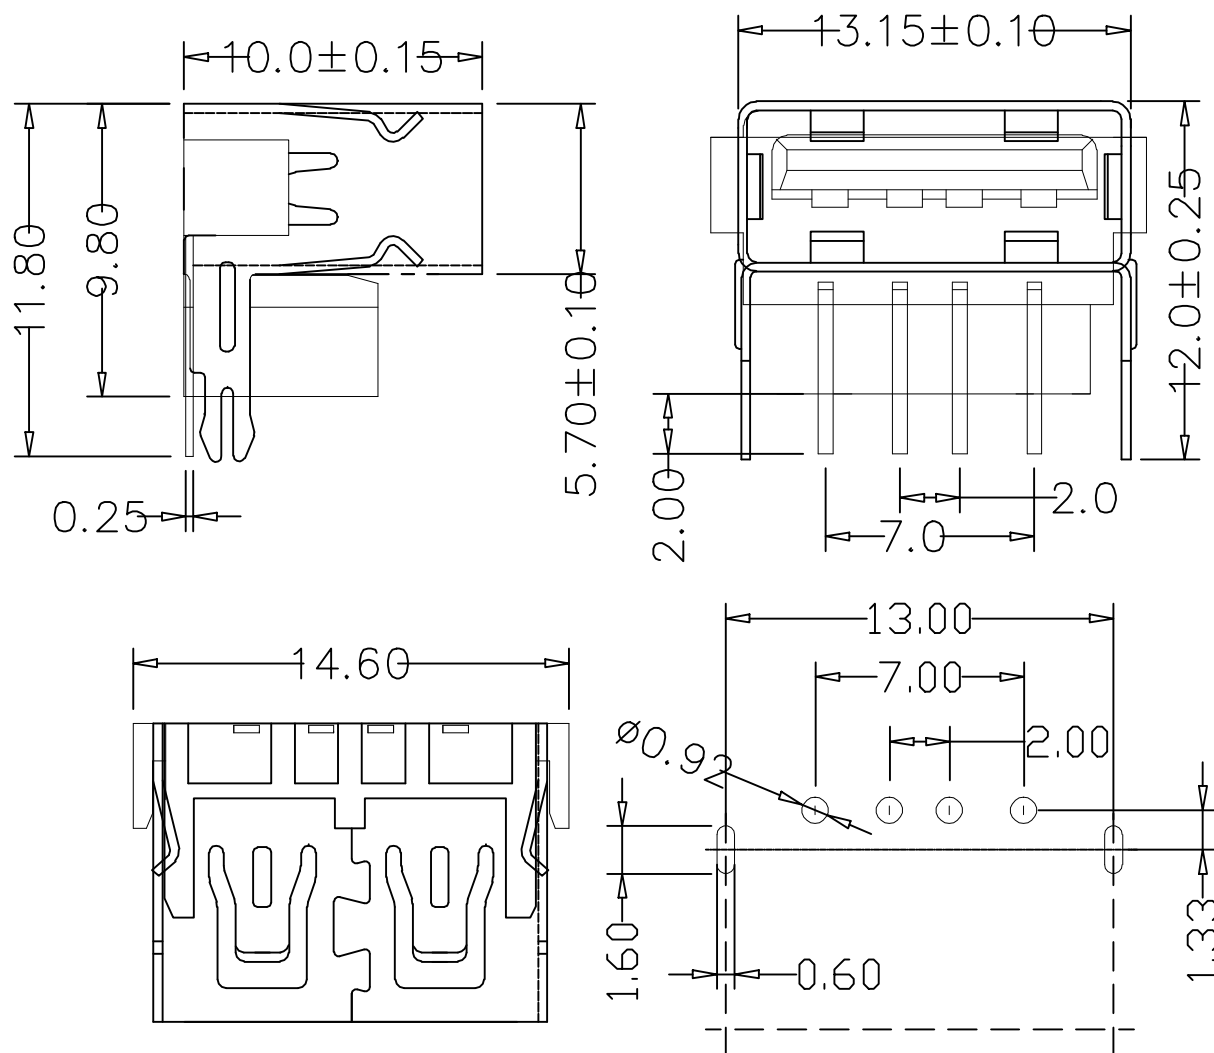

RECOMMENDED P.C.B LAYOUT

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:1.02 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

东莞市溪榜电子有限公司

DONG GUAN XIBANG ELECTRONICS CO., LTD.

TOLERANCE: X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X.X ±0.10 X.X ±0.10 X.X ±0.10		DRAWN BY :	DATE : 2015.08.18	PART NAME: 9.8 后脚直边90度正向	
  UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY :	DATE : 2015.08.18	PART NO.	SEE TABLE
			MOLD NO.		
		APPROVED BY :	DATE :	DRAW NO:	2015.08.18
				SHEET NO.	1 OF 1