

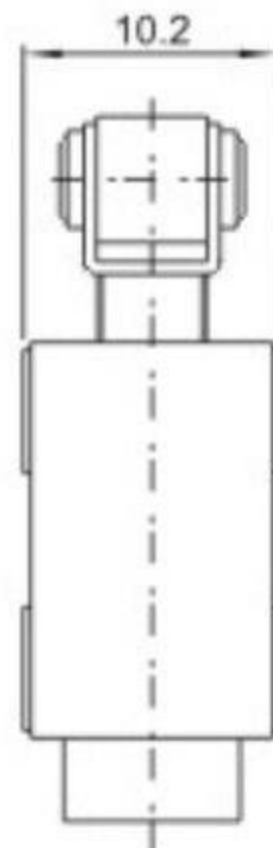
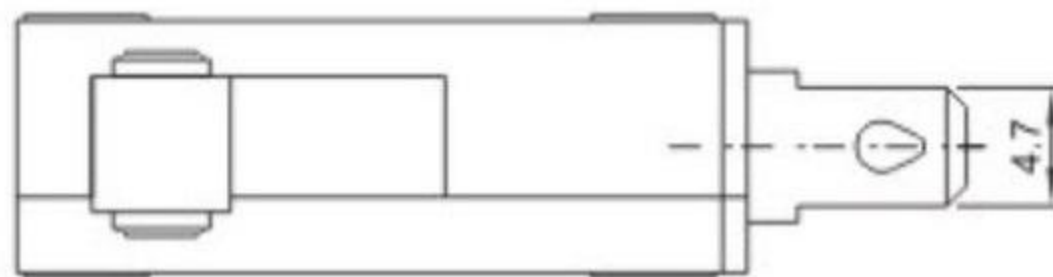


CAD FILE:

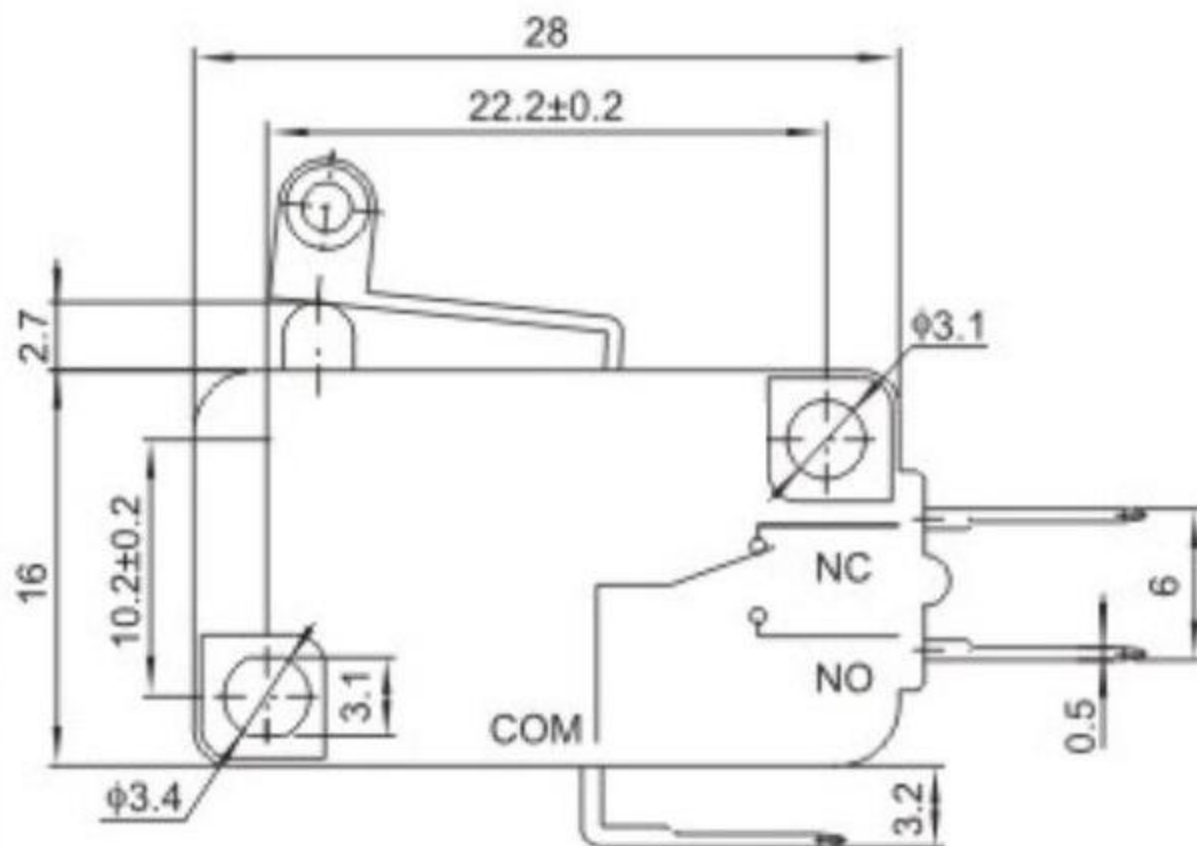

SCHEMATIC (NON-SHORTING)

額定電流、電壓 RATING

16A 250VAC μ 1E4 T85
12A 250VAC/15A 125VAC接觸電阻 CONTACT RESISTANCE $\leq 20\text{m}\Omega$ 絕緣電阻 INSULATION RESISTANCE $\geq 100\text{M}\Omega$ 介電強度 DIELECTRIC INTENSITY $\geq 1250\text{VAC}/3\text{S}$ 電器壽命 ELECTRICAL LIFE $\geq 10,000$ Cycles

注：“*”口表示关键尺寸(4个).

				TOLERANCE					
				UNLESS SPECIFIED					
7	PLASTIC HANDLE	PA66	1	BLACK	WITHIN 1.5mm : $\pm 0.1\text{mm}$	A		初版	
6	CONTACT	AG	1	NATURAL	OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	
5	SHRAPNEL	PBS	1	NATURAL	TITLE : MICRO SWITCH		UNIT : mm	DRWG NO.:	
4	KNOB	PA9T	1	BLACK	MODEL:		SCALE: 3:1	DWN.	刘工
3	COVER	PA66	1	BLACK	东莞市溪榜电子有限公司			CHK'D	戴海明
2	BASE	PA9T	1	BLACK				APPD.	林小姐
1	TERMINAL	BRASS STRIP	3	Ag PLATED					
NO.	PARTS	MATERIALS	Q'TY	FINISH					APPD.