

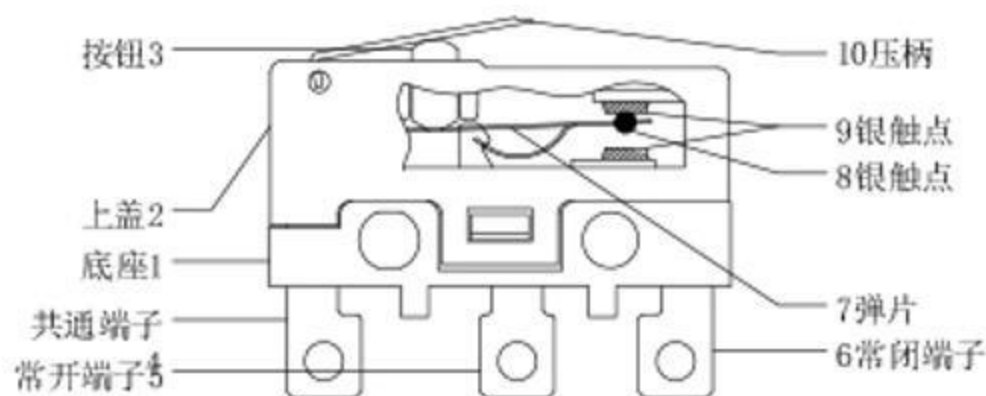
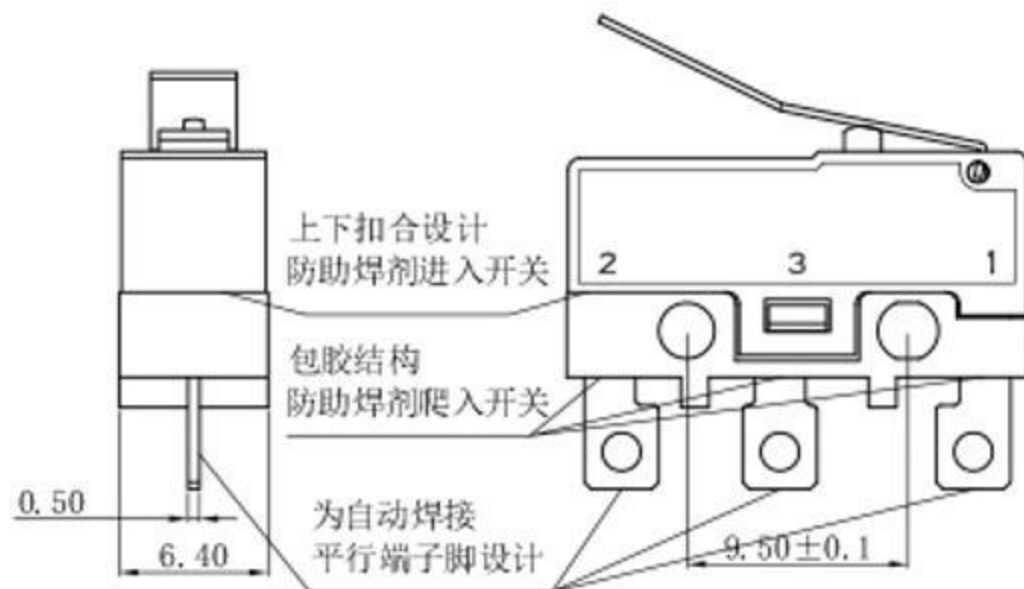


Technical drawing of a mechanical part, showing a cross-section with a central hole and a dimension of 3.70.

Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100mΩ Max	Electrical Life	10,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +125℃
Withstand Voltage	AC 1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	40 ±20gf

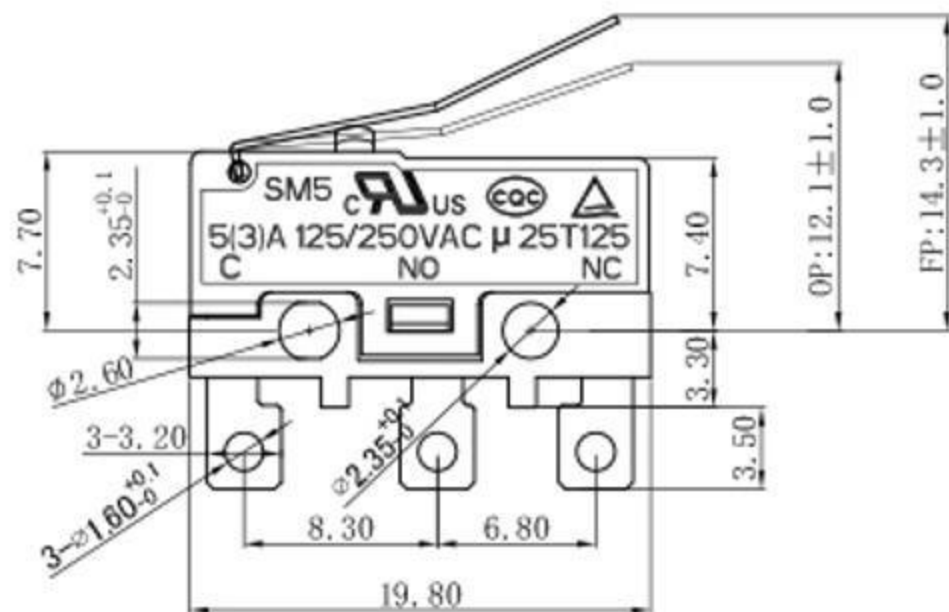

10	压柄	1	不锈钢	
9	端子触点	2	铜合金	
8	弹片触点	1	铜合金	
7	弹片	1	C5210	
6	NC端子	1	C2680	镀银
5	NO端子	1	C2680	镀银
4	COM端子	1	C2680	镀银
3	按钮	1	P07	UL94V-0
2	上盖	1	P07	UL94V-0
1	底座	1	P07	UL94V-0
序号	零件名称	数量	材质	备注

东莞市溪榜电子有限公司

制 图 DRAWN	吕志鹏			东莞市溪榜电子有限公司				
设 计 DESIGN	廖晓斌							
审 核 CHECKED	杨瑞涛	比 例 SCALE	4:1	总 称 TITLE				
获 准 APPROVE	廖晓斌	张 数 SHEET	1/1	微 动 开 关				
一 般 公 差 TOLERANCE		±0.20	单 位 UNIT	mm	偶 尔 编 号 PART NO.			
		±0.15						
		±0.10	角 度 ANGLES	±2.0°	附 图 附 图 P R O J			工 程 图 ENC. DRAW
		±0.05						