

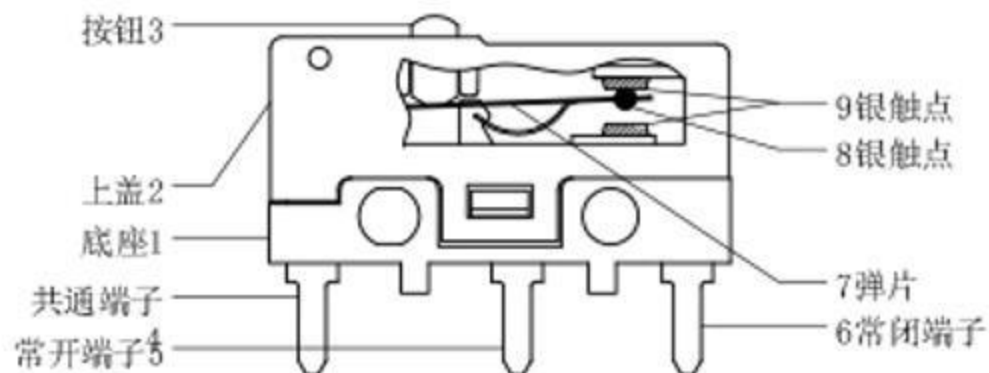
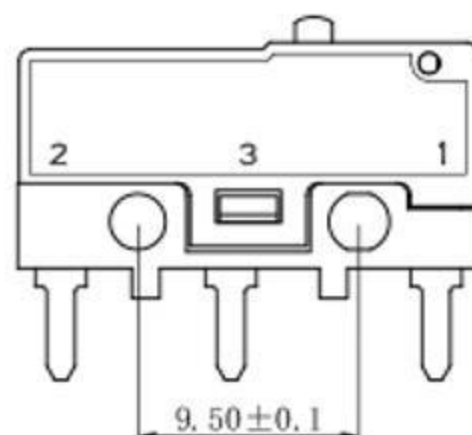
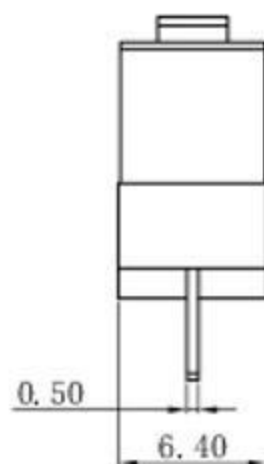


	
---	--

D	E	F	G	H
Rating	10.1A 125/250VAC	Mechanical Life	1,000,000 cycles	
Contact Resistance	100mΩ Max	Electrical Life	10,000 cycles	
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +125℃	
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃	
Soldering Temper.	235±5℃ 5s	Operating Force	150 ±50gf	

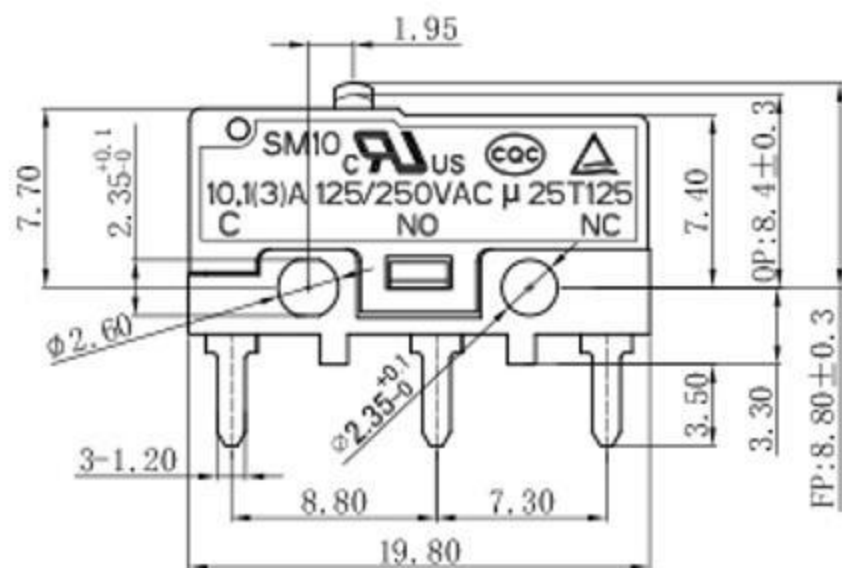

电路图

9	锅子触点	2	铜合金	
8	弹片触点	1	铜合金	
7	弹片	1	C5210	
6	NC端子	1	C2680	镀锌
5	NO端子	1	C2680	镀锌
4	COM端子	1	C2680	镀锌
3	按钮	1	PA6	UL94V-0
2	上盖	1	PA6	UL94V-0
1	底座	1	PA6	UL94V-0
序号	零件名称	数量	材质	备注

东莞市溪榜电子有限公司

制图 DGGX26	品名			东莞市溪榜电子有限公司				
设计 DGGX26	规格							
审核 DGGX26	材料	规格	4:1	名称	微动开关			
标准 DGGX26	规格	数量	1/1	料号				
		单位	PCS	物料编号				
TOLERANCE		±0.20	角度 ANGLES	±0.0°	料号	规格		工程图 ENC 100X
		±0.15						
		±0.10						
		±0.05						