

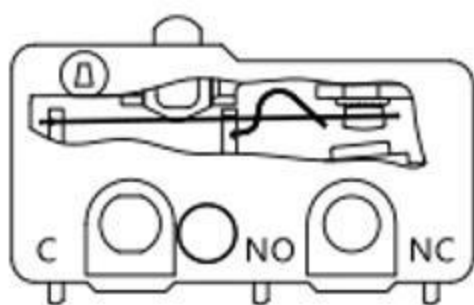
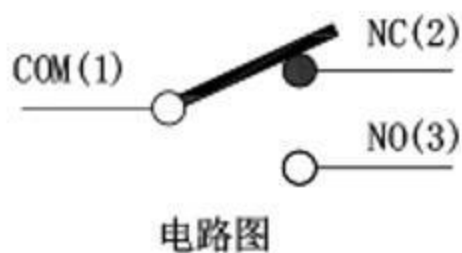
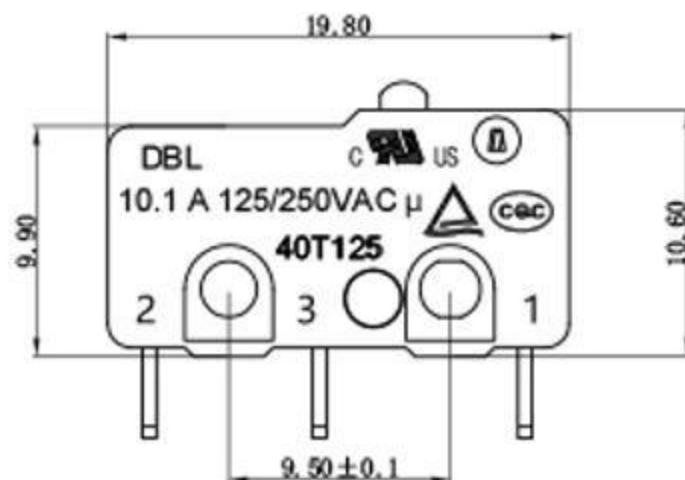


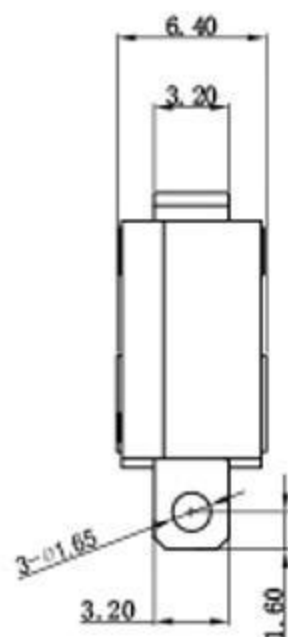

Rating	10.1A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	10,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	200gf MAX

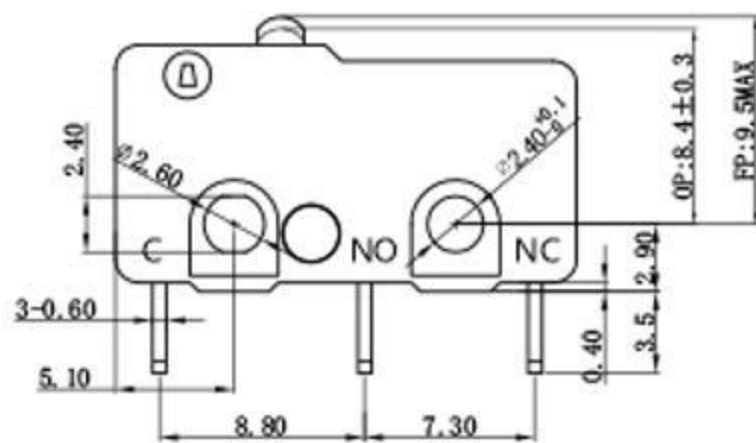

10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	C2600	
5	NC端子(NC TERMINAL)	1	C2600	
4	COM端子(COM TERMINAL)	1	C2600	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

制 图 DRAWN	日 期	东 莞 市 溪 榜 电 子 有 限 公 司									
设 计 DESIGN	图 号										
审 核 CHECKED	材 料 号	比 例 SCALE	4:1	名 称 TITLE	微 动 开 关						
获 准 APPROVED	图 号	张 数 SHEET	1/1	料 号 P/N NO.							
一 般 公 差 TOLERANCE	B-D	±0.20	单 位 UNIT	图 具 编 号 P/N NO.							
	E-D	±0.10									
	F-G	±0.10	角 度 ANGLES	±2.0°	材 质 MATERIAL	角 注 PROJ		工 程 图 ENC 000#			

东莞市溪榜电子有限公司

版本 REV.	版本 REV.	日期 DATE	变更内容 REVISION	修改 REV.	批准 APPROVED
------------	------------	------------	------------------	------------	----------------