

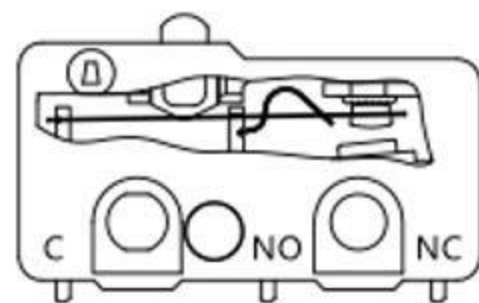
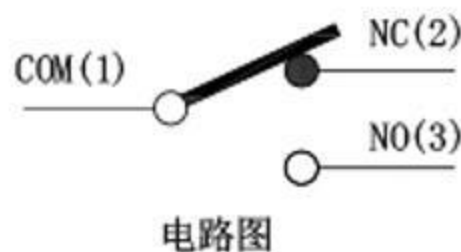
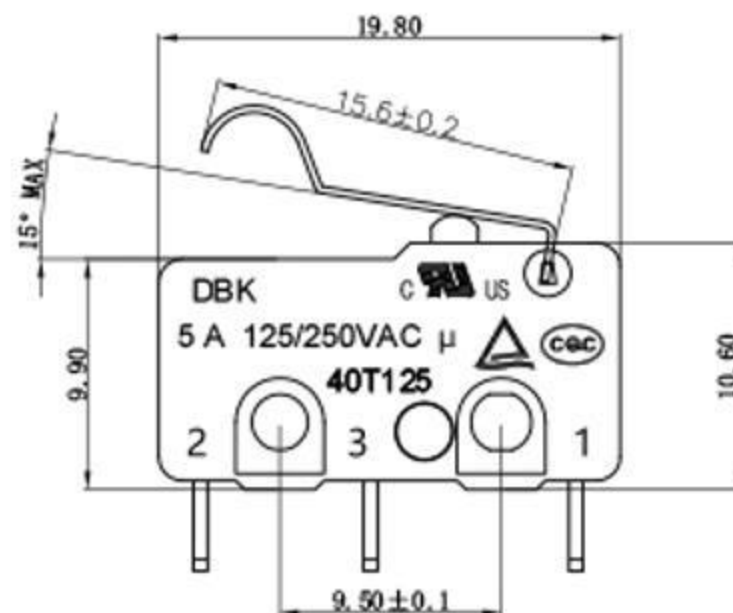


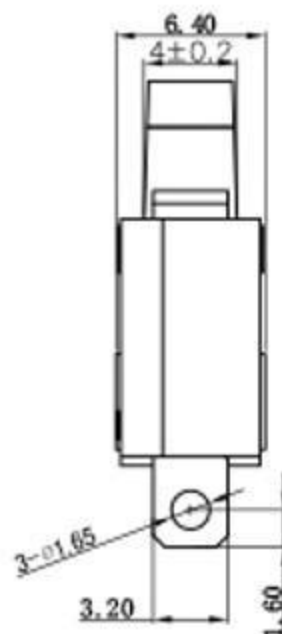

Rating	5A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	10,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40°C to +125°C
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40°C
Soldering Temper.	235±5°C 5s	Operating Force	70gf MAX

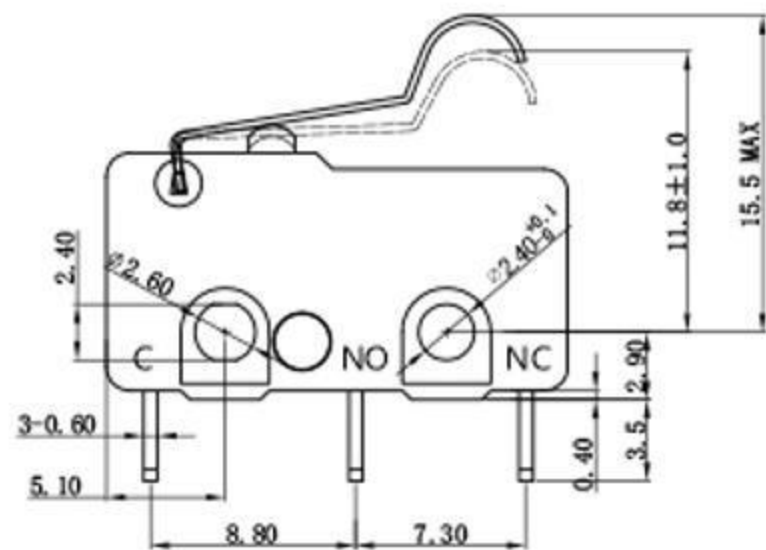

11	压柄(Lever)	1	SUS	
10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	C2600	
5	NC端子(NC TERMINAL)	1	C2600	
4	COM端子(COM TERMINAL)	1	C2600	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材料 Material	备注 Notes

制 图 DRAWN	品 名 NAME	东莞市溪榜电子有限公司			
设 计 DESIGN	规格书 SPEC	比例 SCALE	4:1	名 称 TITLE	微动开关
审 核 CHECK	图 号 DRAWING NO.	版 数 REV	1/1	制 号 P/N NO.	
获 准 APPROVE	单 位 UNIT	角 度 ANGLES	±2.0°	图 号 P/N NO.	
一 般 公 差 TOLERANCE	±0.20 ±0.15 ±0.10 ±0.05			图 号 P/N NO.	
				图 号 P/N NO.	
版 本 REV	版 本 REV	日 期 DATE	变 更 内 容 DESCRIPTION	修 改 REV	获 准 APPROVE