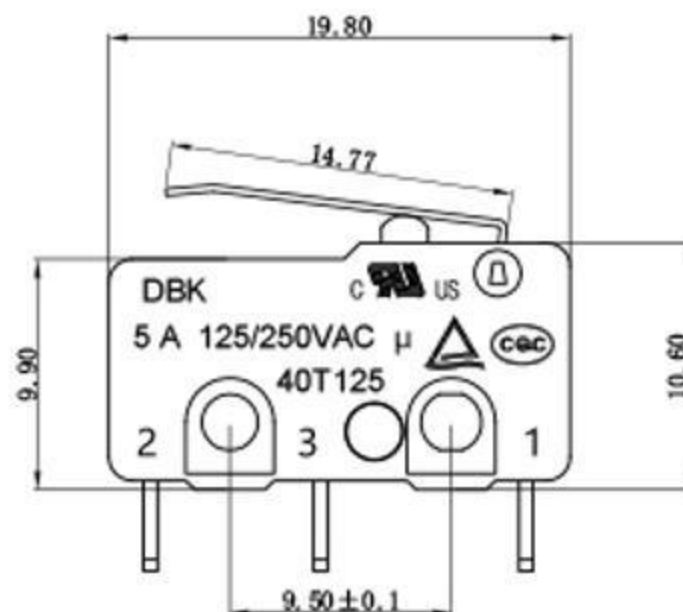
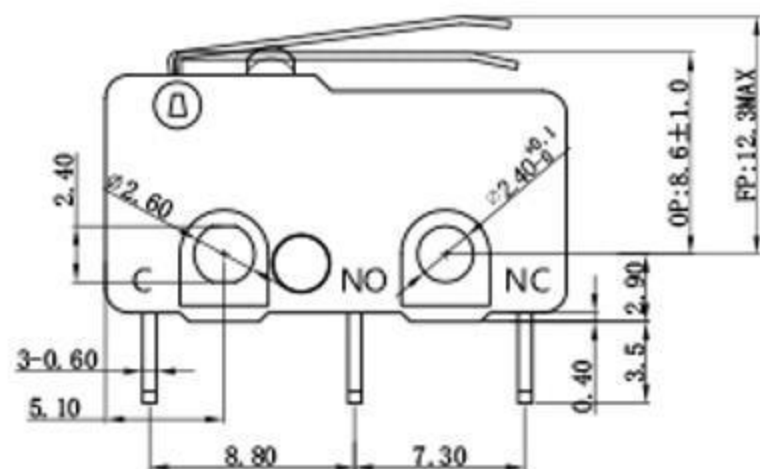
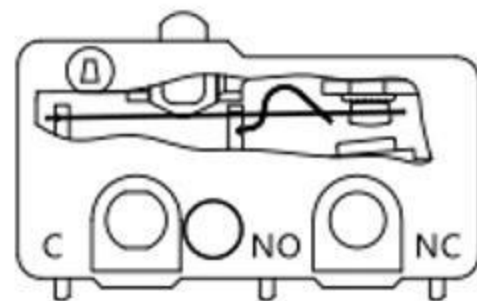


Rating	5 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	10,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	70gf MAX

11	压柄(Lever)	1	SUS	
10	铆钉(Rivet)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	C2600	
5	NC端子(NC TERMINAL)	1	C2600	
4	COM端子(COM TERMINAL)	1	C2600	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

东莞市溪榜电子有限公司

制 图 DRAWN	陈志鹏	
设 计 DESIGN	廖晓斌	
审 核 CHECKED	杨瑞峰	
批 准 APPROVE	廖晓斌	
一 般 公 差 TOLERANCE	未注 未注 未注 未注	±0.20 ±0.15 ±0.10 ±0.05

比 例 SCALE	4:1	名 称 TITLE	微动开关
版 数 SHEET	1/1	制 号 P.N. NO.	
单 位 UNIT	个	图 号 P.N. NO.	
角 度 ANGLES	±0.0°	图 号 P.N. NO.	

版 本 REV.	ECN 编号 ECN NO.	日 期 DATE	变 更 内 容 DEFINITION	修 改 DATE	批 准 APPROVE	工 程 图 ENC. NO.
-------------	-------------------	-------------	-----------------------	-------------	----------------	-------------------