
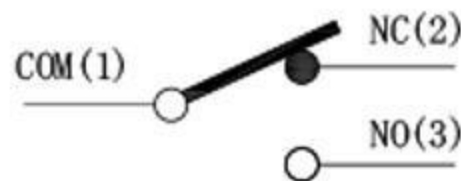
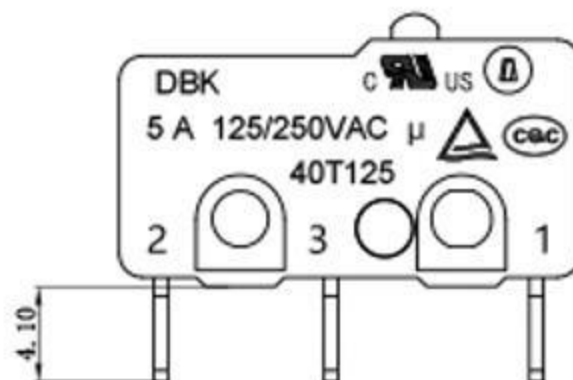
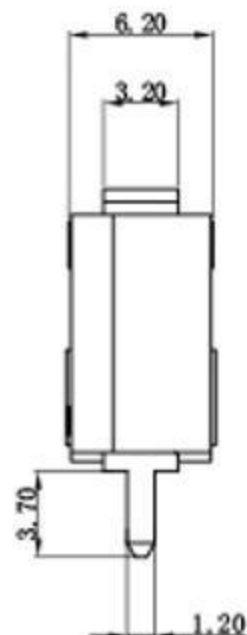
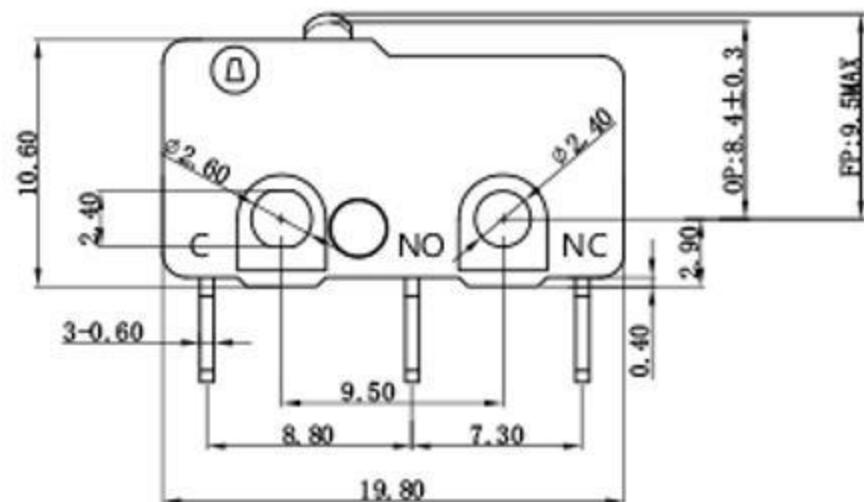


Rating	3 A 125/250VAC	Mechanical Life	1,000,000 cycles
Contact Resistance	100m Ω	Electrical Life	50,000 cycles
Insulation Resistance	>100M Ω DC500V	Ambient Temper. Used	-40℃ to +125℃
Withstand Voltage	AC1500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	200gf MAX

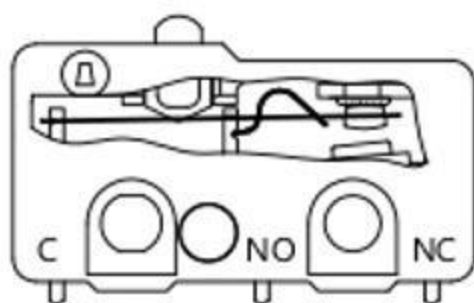

电路图

10	螺钉(Screw)	1	AL	
9	触点(CONTACT)	3	Silver Alloy	
8	C弹片(C SPRING)	1	C17200	
7	弹片(SPRING)	1	C5210	
6	NO端子(NO TERMINAL)	1	NL	
5	NC端子(NC TERMINAL)	1	C2600	
4	COM端子(COM TERMINAL)	1	C2600	
3	按钮(BUTTON)	1	PBT	UL94V-0
2	下盖(BASE)	1	PBT	UL94V-0
1	上盖(COVER)	1	PBT	UL94V-0
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

东莞市溪榜电子有限公司

微动开关

版本 REV.	ECN 编号 ECN NO.	日期 DATE	变更内容 DESCRIPTION	修改 DATE	批准 APPROVE	制图 DRAWN	设计 DESIGN	审核 CHECKED	批准 APPROVE	比例 SCALE	4:1	标题 TITLE	微动开关		
										数量 QTY	1/1	料号 P/N NO.			
										公差 TOLERANCE	0.1	器具编号 P/N NO.			
										角度 ANGLES	±2.0°	规格 SIZE			