


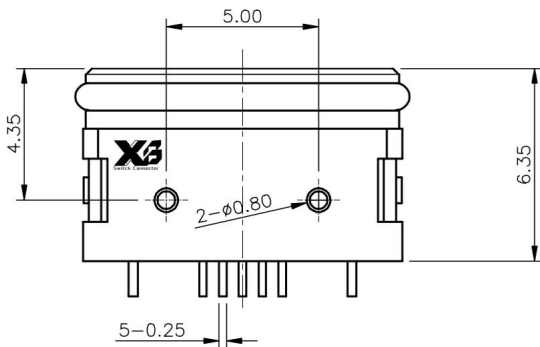
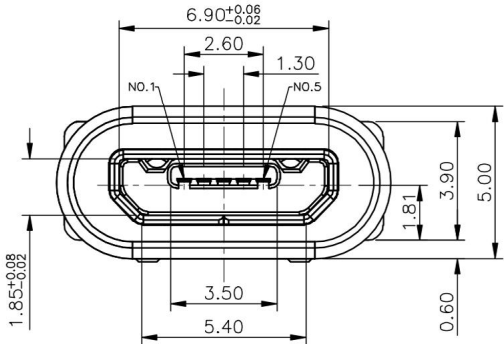




ROHS

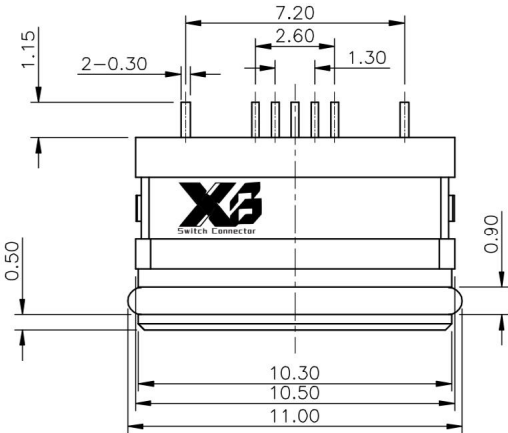

组装示意图

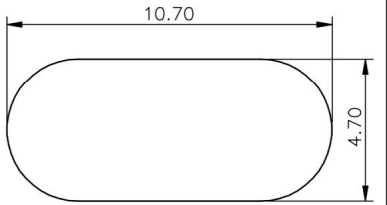


开孔尺寸参考
组装外壳时需要打环保润滑油

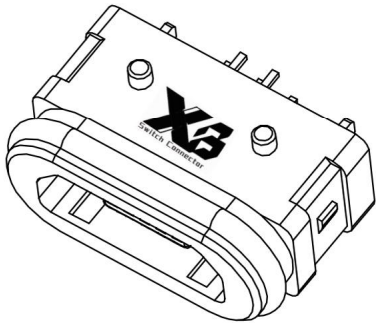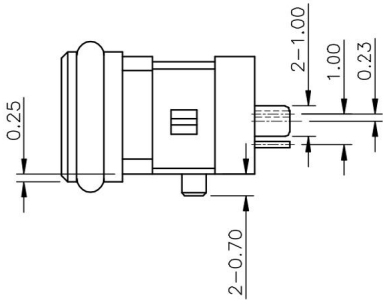

3D VIEW

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
X1	NA		INITIAL RELEASE	2018.04.23	WIND

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

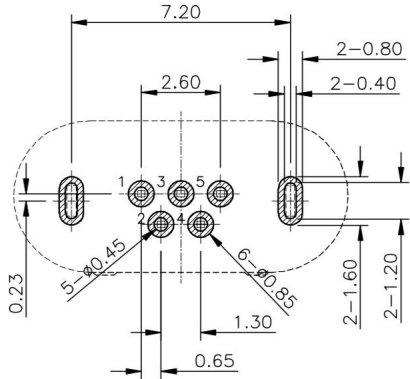

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 1.5A
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - INSULATION RESISTANCE: 1000MΩ MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - INSERTION FORCE: 3.5Kg (35N) Max.;
 - EXTRACTION FORCE: 0.8Kg (8N) Min.;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8
 - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.

⑤	Oval ring	1	橡胶胶	Black
④	Inner shell	1	SUS304	Nickel plated
③	Terminal	5	C5191, 0.15t	Gold Plated On Contact Area.
②	Outer shell	1	PA9T	Black
①	Body	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

This document is the property of
Xi Bang Electronic Technology
Co., Ltd.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Unless otherwise
specified, Tolerance:

X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

DESIGN	GAO. PENG	DATE	2018.04.23
CHECKED	HE. LONG. FEI	DATE	
APPROVED	PANG. DONG	DATE	
PART NO.	XB-USB-M-5P-1189-250-IPX7	REV.:	X1
DRAWING NO.		SCALE:	6:1

TITLE:	MICRO USB 2.0 B TYPE RECEPTACLE
CUSTOMER DRAWING	
SIZE:	A4
SHEET:	1/1

