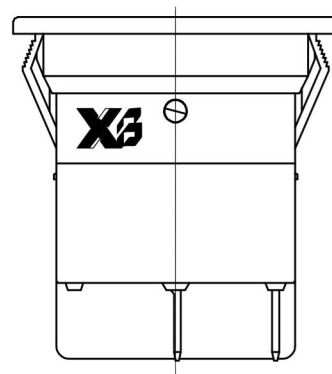
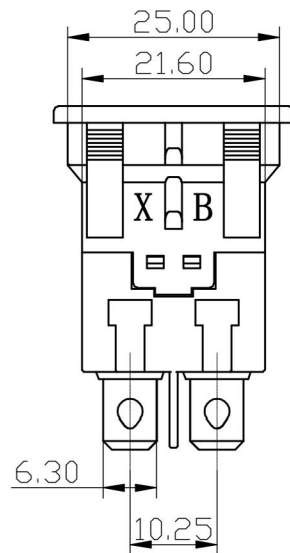
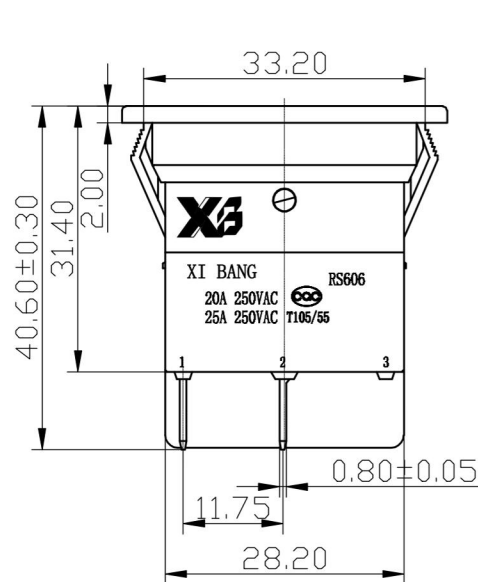


PANEL CUT-OUT		
Z	Y	X
0.80~1.00	25.10~25.30	33.3~33.4

PANEL CUT-OUT

NOTES:

1. Rating:

CQC 20A 250VAC 25A 250VAC T105/55

2. Circuit Diagram: 4P ON-OFF

3. Terminal Strength: $\geq 80N$




4. Electrical life: ≥ 10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min
Terminals to Button: 3000VAC 1min
Leakage Current: 1mA

6. Current resistance: $\leq 50m\Omega$ (initial)

7. Insulation resistance: $\geq 100M\Omega$

8. Body Material: NYLON 66 94V-0~2

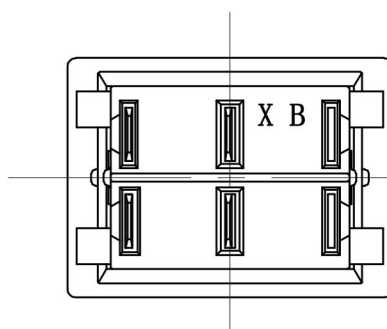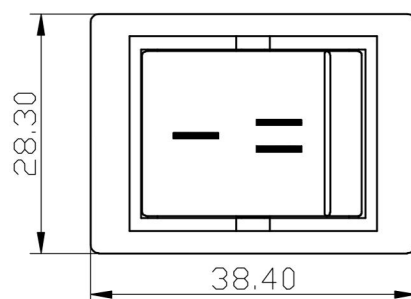

11	上座	1	环保阻燃PA66		
10	底座	1	环保阻燃PA66		
9	弯端	2	0.8mm紫铜带 +复合银触点	镀锡	
8	中端	2	1.2mm紫铜带	镀锡	
7	接触桥	2	1.2mm紫铜带 +复合银触点	镀银	
6	内支撑架	1	环保阻燃PC		
5	套管	2	0.3mm拉伸钢	镀锌	
4	弹簧	2	ø0.40弹簧钢丝	发黑	
3	灯泡	1	环保阻燃PA66		红灯
2	内套	1	环保阻燃PA66		
1	按钮	1	环保阻燃PC		
序号	名称	数量	材料	处理	备注

A4				普通公差:		 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	跷板开关	比 例	Free
A1				ABOVE 5 TO 30	±0.30	绘 图	GAO. PENG	核 对	PANG. DONG	型 号	XB-RS-606EFA		
				ABOVE 30	±0.50	日 期		2024. 3. 8		核 准			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	DATE	2024. 3. 8	APPROVAL BY	HE. LONG. FEI	DWG NO.	XB Rocker switch		